

HSF 禁止使用1級環境管理物質

Approve Sign


Note:

1.Mechanical demands

- 1.Contact force: 60g±20% at 1mm working stroke
- 2.Plating plunger: Brass 3u" Au over 50~100u" Ni.
- Plating barrel: Brass 1u" Au over 50~100u" Ni.

2.Inspection(working stroke)

- 1.Rated current & voltage: DC12V; 1A
- 2.Life test: 20,000 cycles
- 3.Contact resistance: 100 mohm Max.

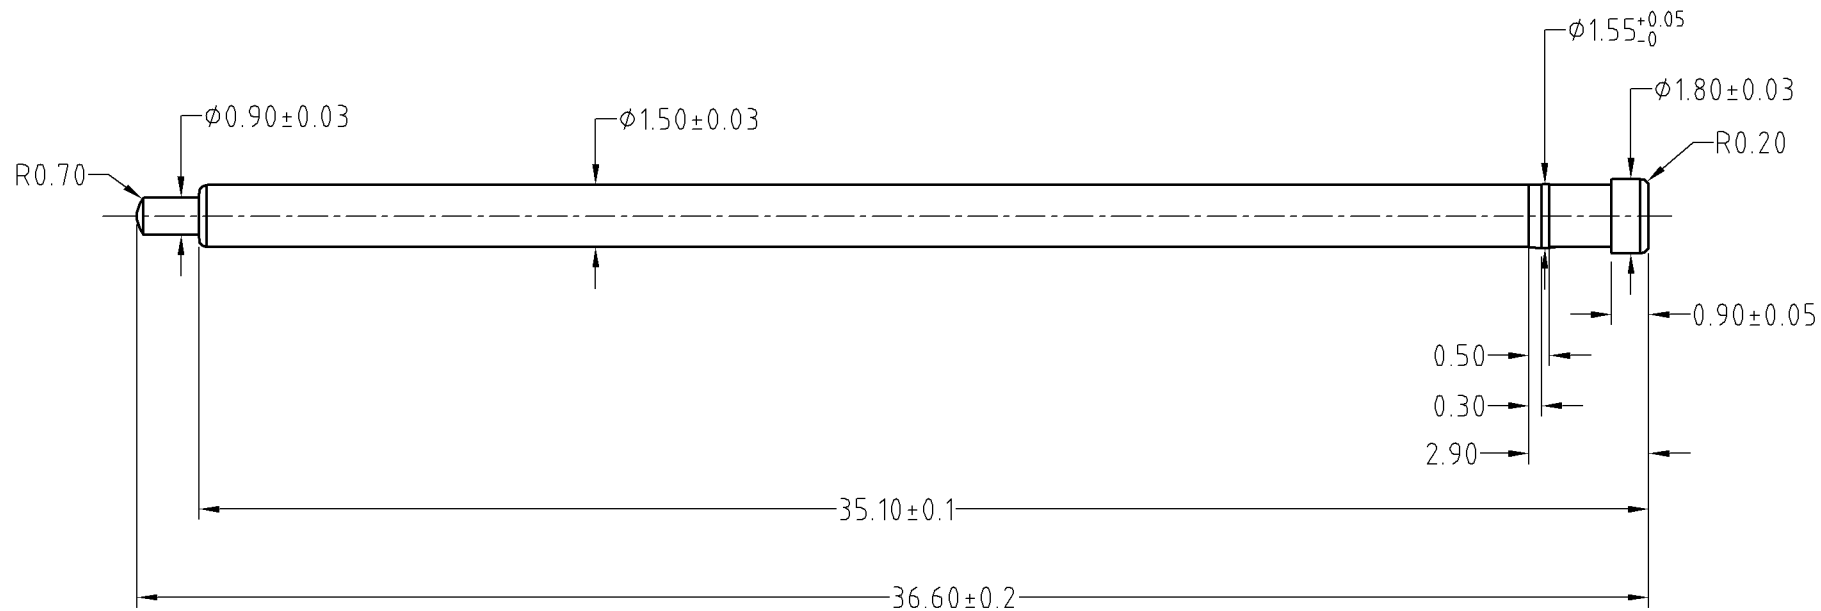

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±1°	A4	SHEET: 1 of 1	
	±0.02			
	±0.05	DRAW		
	±0.10	CHECK		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

		川富科技股份有限公司 CFE CORPORATION CO.,LTD.	
PART NO.	BF04336		
FILE NAME	BF04336		
TITLE.	Pogo pin connector		

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		