

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

1.Mechanical demands

.Contact force: 65g~95g at 0.9mm working stroke


.Plating plunger: Brass 15u" Au over 50u" Ni.

.Plating barrel: Brass 15u" Au over 50u" Ni.

2.Inspection(working stroke)

.Rated current & voltage: DC24V; 1A

.Life test: 10,000 cycles

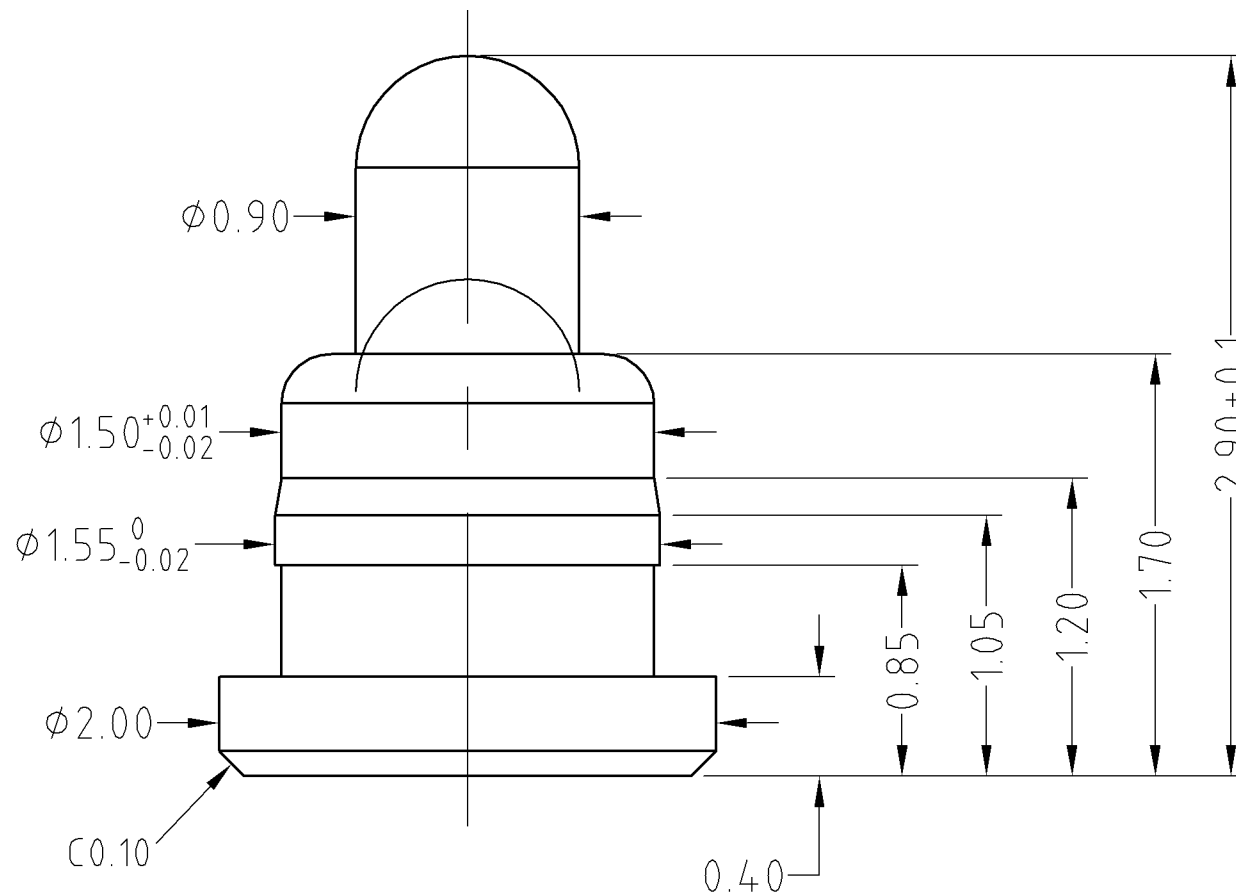

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	$\pm 1^\circ$	A4	SHEET: 1 of 1	
0.000	± 0.02		PART NO. BF08211	
0.00	± 0.05	DRAW	FILE NAME BF08211	
0.0	± 0.10	CHECK	TITLE. Pogo pin connector	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

CFE 东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	A0	2013.07.16	NEW		