

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plating plunger: Brass 3u" Pd-Ni over 51u" Ni.

.Plating barrel: Brass 3u" Pd-Ni over 51u" Ni.

.Spring: SUS

Mechanical:


.Contact force: 45g±10g at working height

.Life test: 10,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A Max.

.Contact resistance: 200 milliohm Max.

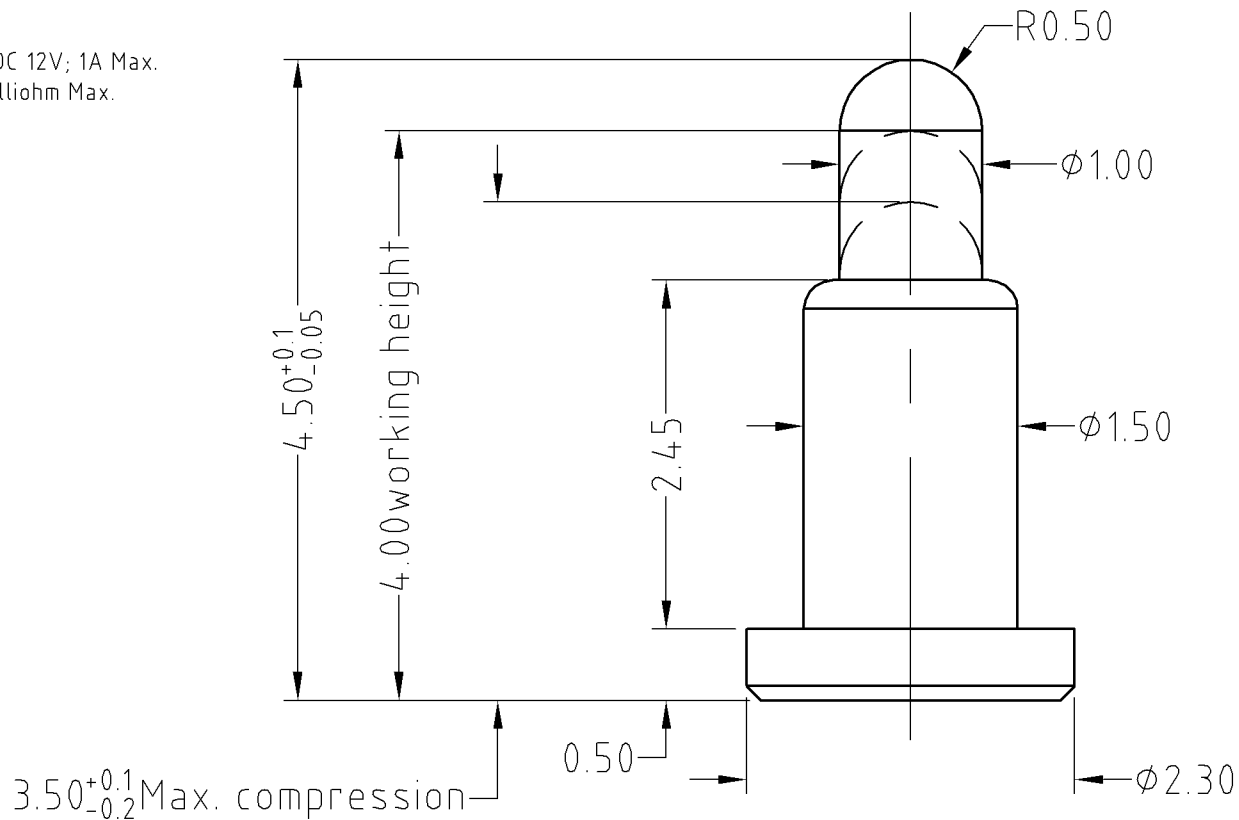

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	$\pm 1^\circ$	A4	
0.000	± 0.02		
0.00	± 0.05	DRAW	
0.0	± 0.10	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED			APPRO

CFE 东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	A0	2013.08.05	NEW		

PART NO.	BF09S11
FILE NAME	BF09S11
TITLE.	Pogo pin connector

SHEET: 1 of 1