

1

2

3

4

Note:

Materials:

.Plunger: Brass 20u" Au over 50u" Ni.

.Spring: SUS surface treatment

.Barrel: Brass 20u" Au over 50u" Ni.

Mechanical:

.Contact force: 70g±20g at 1.0mm working stroke

.Life test: 100,000 cycles


Electrical:

.Rated current & voltage: DC12V; 3A Max.

.Contact resistance: 30 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

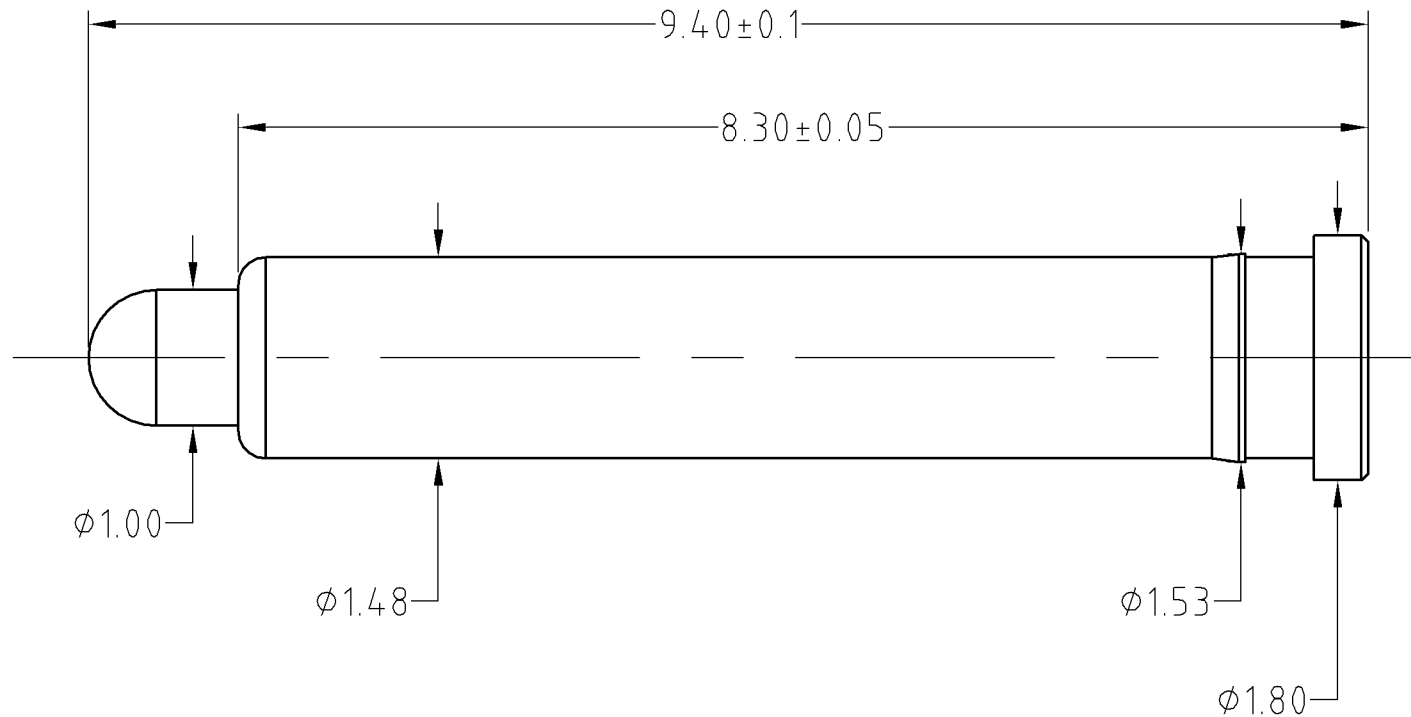

| | | | |
|--------------|-----|------------|-------------|
| | D0 | 2013.02.26 | NEW |
| ECN(DCN) NO. | REV | DATE | DESCRIPTION |

| | | | | |
|--|-------|---------|--|--------------------|
| SCALE | 10:1 | UNIT:mm | THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | |
| ANGEL | ±1° | A4 | SHEET: 1 of 1 | |
| 0-6 | ±0.05 | | | |
| 6-30 | ±0.10 | DRAW | PART NO. | BF13601 |
| 30-150 | ±0.15 | CHECK | FILE NAME | BF136XX |
| GENERAL TOLERANCE UNLESS OTHERWISE NOTED | APPRO | | TITLE. | Pogo pin connector |

