


Note:
 Materials:
 .Plunger: Brass Au over 0.25um Ni.
 .Spring: SUS
 .Barrel: Brass Au over 0.25um Ni.
 Mechanical:
 .Contact force: 40g±10g at 1.0mm working stroke
 .Full stroke: 1.40mm
 .Life test: 50,000 cycles
 Electrical:
 .Rated voltage: DC12V, 1A Max.
 .Contact resistance: 50 milliohm Max.

Standard tolerances are:
 .Diameters: +/-0.05mm
 .Lengths: +/-0.15mm
 .Angles: +/-2°

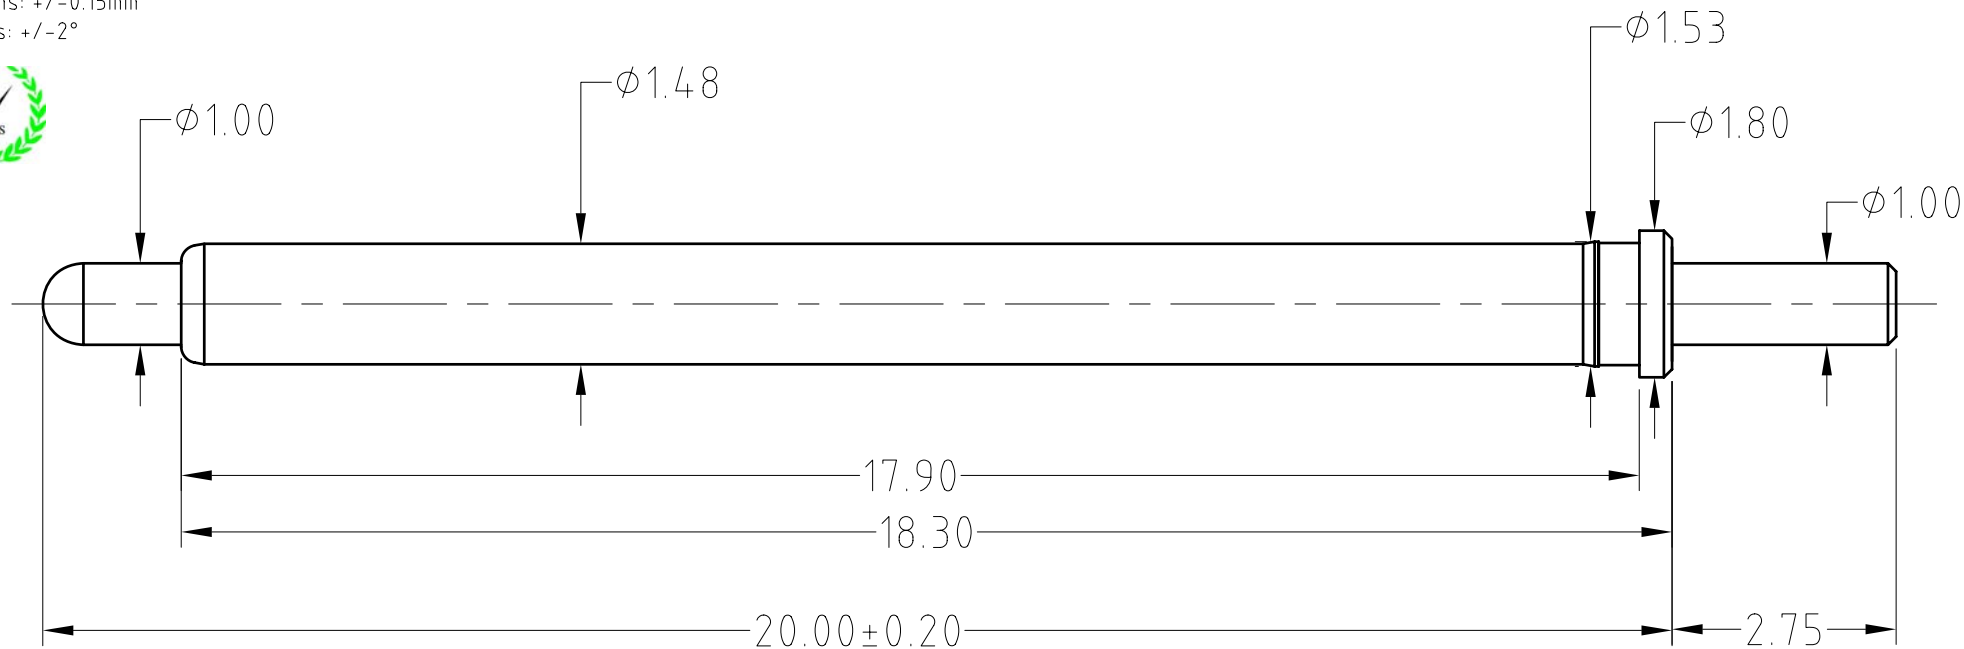

| BOM | | |
|---------|------------|-----|
| Part | NO. | Qty |
| Plunger | M501-P1010 | 1 |
| Barrel | B263-B1010 | 1 |
| Spring | B263-S1001 | 1 |

| | | | | | |
|------------------------------------------|-------|---------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------|---------|
| SCALE | 20:1 | UNIT:mm | THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. | 东莞市川富电子有限公司 CFE CORPORATION | |
| ANGEL | ±1° | A4 | | | |
| 0~6 | ±0.05 | | SHEET: 1 of 1 | PART NO. | BP26311 |
| 6~30 | ±0.10 | DRAW | | FILE NAME | BP263XX |
| 30~150 | ±0.15 | CHECK | | TITLE. | Barrel |
| GENERAL TOLERANCE UNLESS OTHERWISE NOTED | | APPRO | | | |

| ECN(DCN) NO. | REV | DATE | DESCRIPTION |
|--------------|-----|------------|-------------|
| | A0 | 2016.03.14 | NEW |