

-Materials:


.Insulator: Black plastics (265°C) UL94 V-0

.Pin: Brass Au over Ni


NN-Pins
01~64

GG-pin
10-0.125um
20-0.25um
30-0.375um
40-0.5um
50-0.75um
...

Single row series → FF400 - 11 GG - A NN 100A

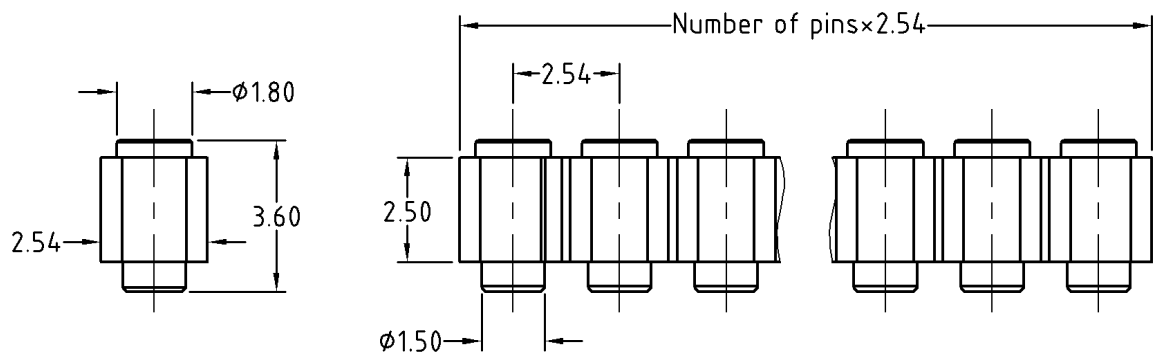

Double row series → FF400 - 11 GG - B NN 100A

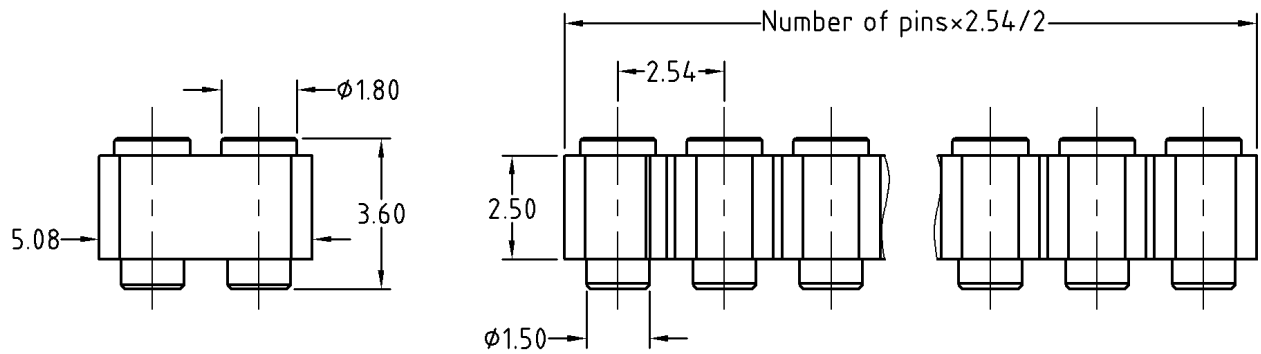

-Materials:


.Insulator: Black plastics (265°C) UL94 V-0

.Pin: Brass Au over Ni


NN-Pins
01~64

GG-pin
10-0.125um
20-0.25um
30-0.375um
40-0.5um
50-0.75um
...

Single row series → FP430 - 11 GG - A NN 100A

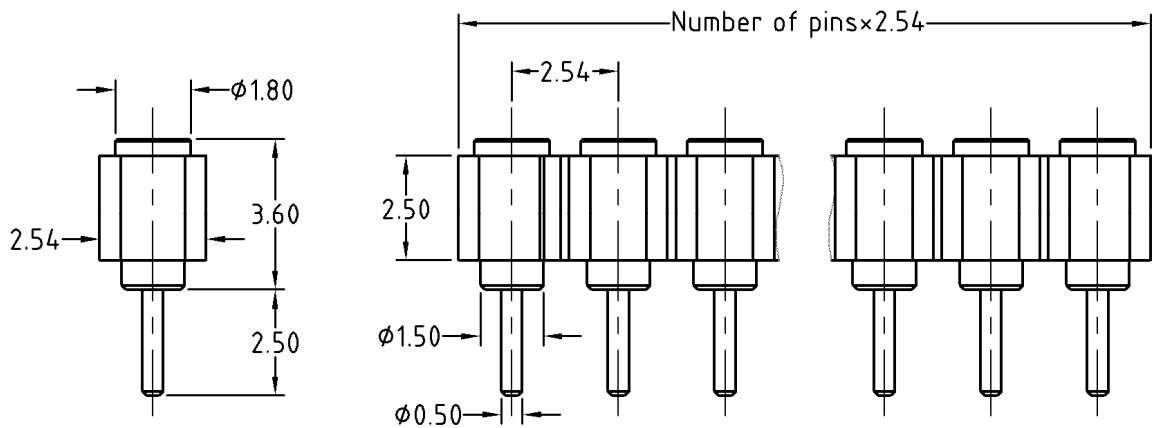

Double row series → FP430 - 11 GG - B NN 100A

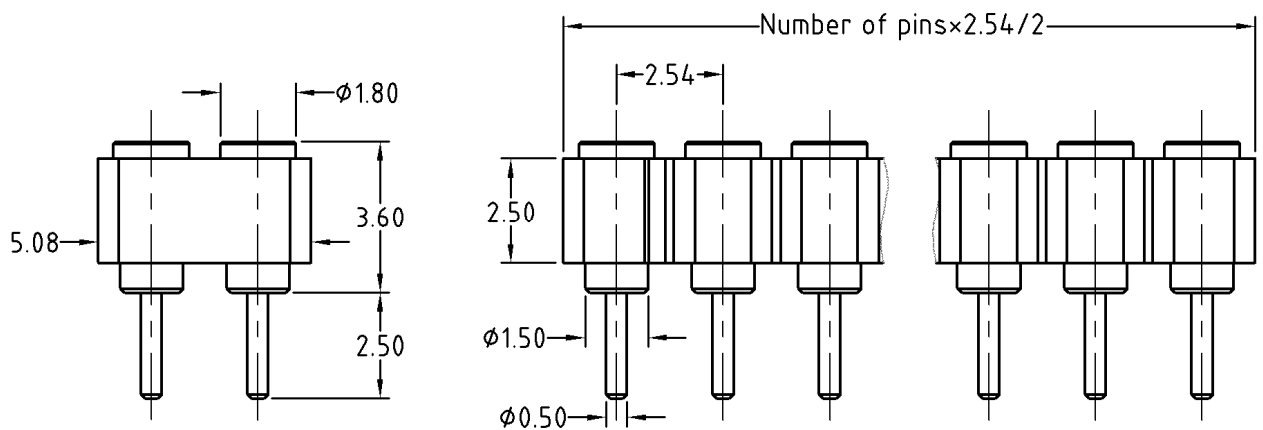

-Materials:


.Insulator: Black plastics (265°C) UL94 V-0

.Pin: Brass Au over Ni


NN-Pins
01~64

GG-pin
10-0.125um
20-0.25um
30-0.375um
40-0.5um
50-0.75um
...

Single row series → FP410 - 11 GG - A NN 100A

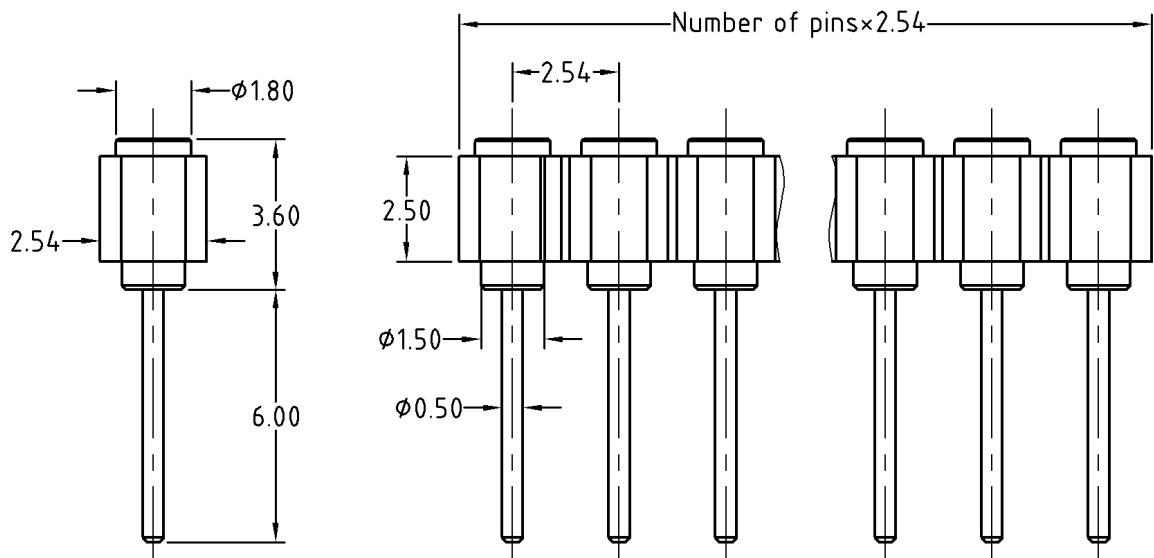

Double row series → FP410 - 11 GG - B NN 100A

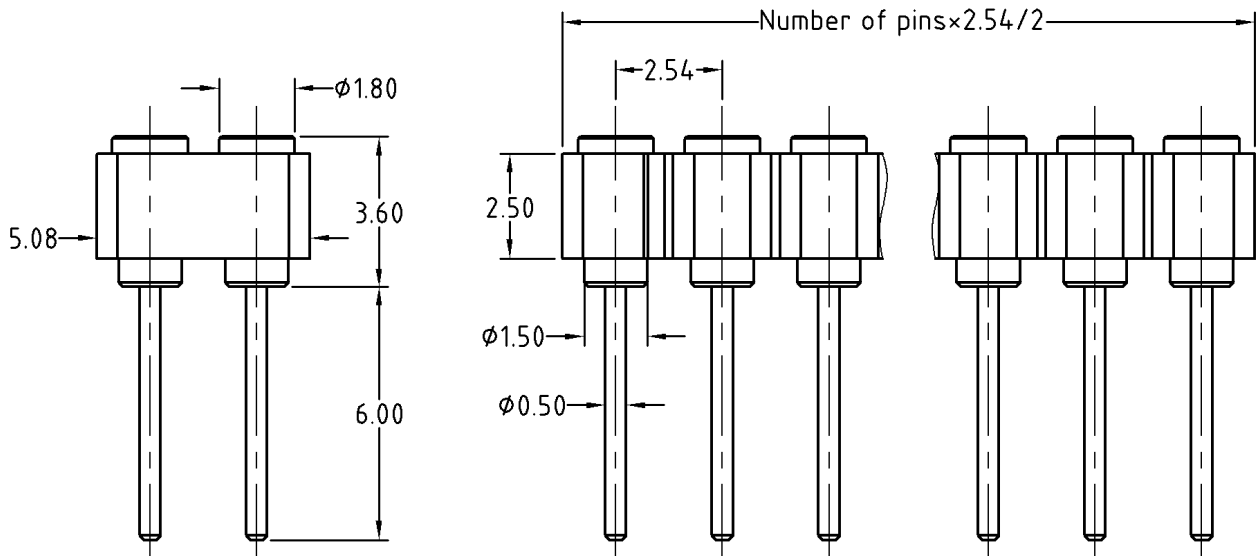

Spring-Loaded Connectors

2.54mm pitch grid target connector
Single and Double row strips


-Materials:

- .Insulator: Black plastics (265°C) UL94 V-0
- .Pin: Brass Au over Ni

NN-Pins
01~64

GG-pin
10-0.125um
20-0.25um
30-0.375um
40-0.5um
50-0.75um
...

Single row series → FP420 - 11 GG - A NN 100A

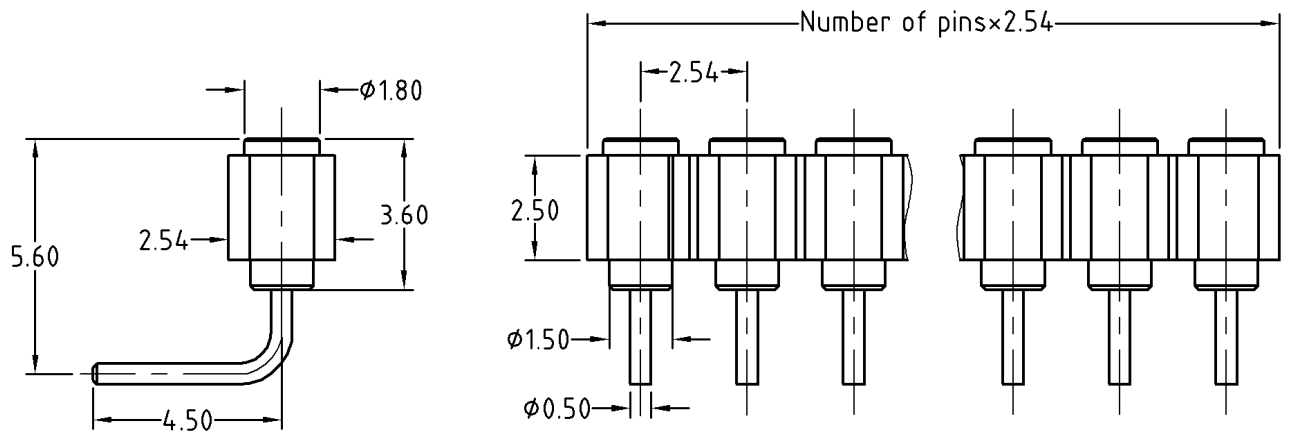

Double row series → FP420 - 11 GG - B NN 100A

