

1

2

3

4



HSF 禁止使用1级环境管理物质

Approve Sign

Note:
 Materials:
 .Plunger: Brass 20u" Au over 50u" Ni
 .Barrel: Brass 15u" Au over 50u" Ni
 .Plating spring: SUS insulate coating
 .Bead: Ceramic bead

Mechanical:
 .Contact force: 100g±20g at 0.8mm working stroke
 .Life test: 10,000 cycles

Electrical:
 .Rated current & voltage: DC 20V; 5A

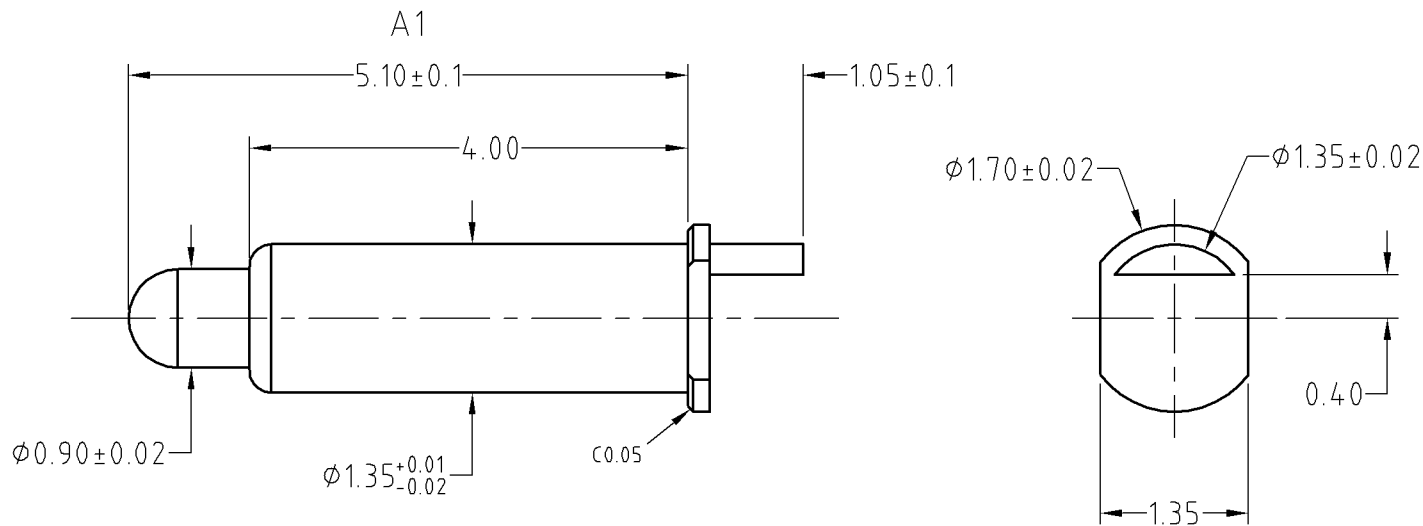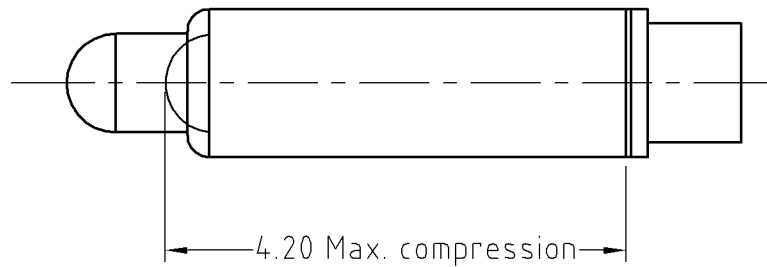

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±1°	A4	
0-6	±0.05		
6-30	±0.10	DRAW	
30-120	±0.15	CHECK	SHEET: 1 of 1
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

CFE 东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

20131126002	A1	2013.11.26	修改5.15+/-0.1-->5.10+/-0.1					PART NO.	BE03932
	A0	2013.11.07	NEW					FILE NAME	BE03921
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO			TITLE.	Pogo pin connector