

1

2

3

4

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plunger: Brass 10u" Au over 50u" Ni

.Barrel: Brass 15u" Au over 50u" Ni

.Spring: SUS insulate coating

Mechanical:

.Contact force: 50g±20% at 0.9mm working stroke

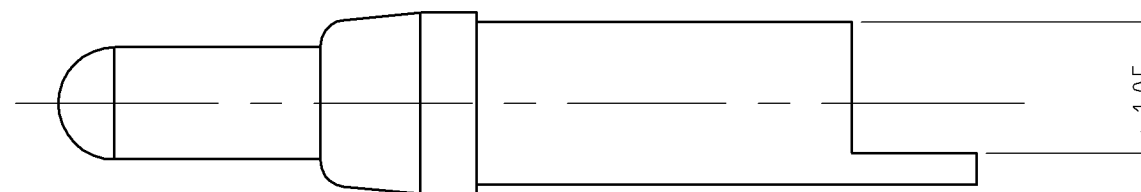
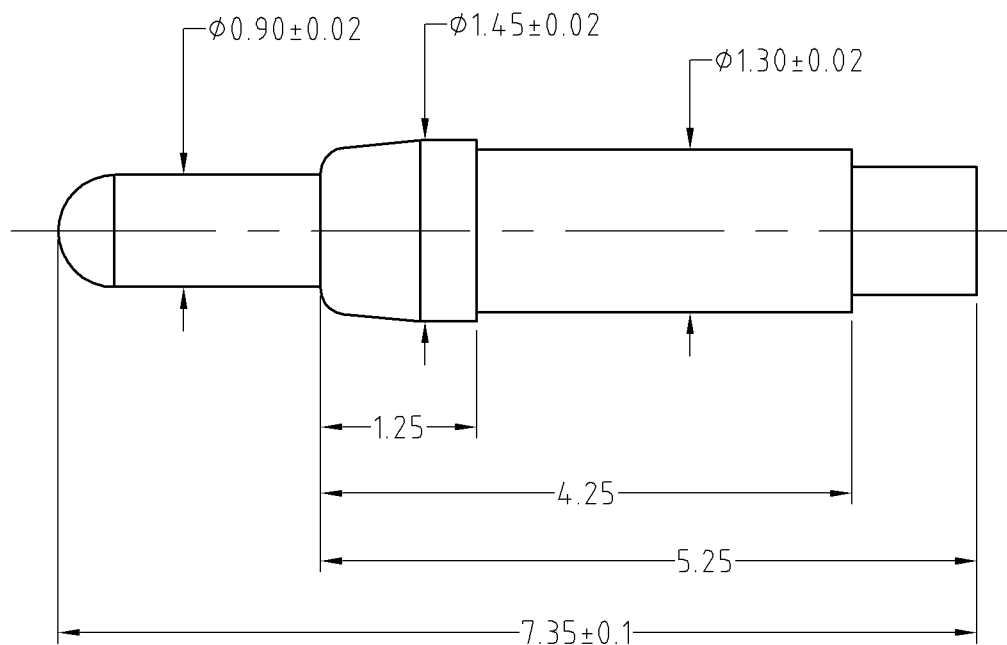
.Full stroke: 1.60mm



.Life test: 20,000 cycles

Electrical(working stroke):

.Rated current & voltage: DC20V; 5A

.Contact resistance: 50 milliohm Max.



SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 <b>东莞市川富电子有限公司</b> CFE CORPORATION CO.,LTD.			
ANGEL	±1°	A4				SHEET: 1 of 1	
0.000	±0.02					PART NO.	BE06712
0.00	±0.05	DRAW				FILE NAME	BE06711
0.0	±0.10	CHECK	TITLE	Pogo pin connector			
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO					

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	A0	2013.07.17	NEW		