

HSF 禁止使用1级环境管理物质

Approve Sign

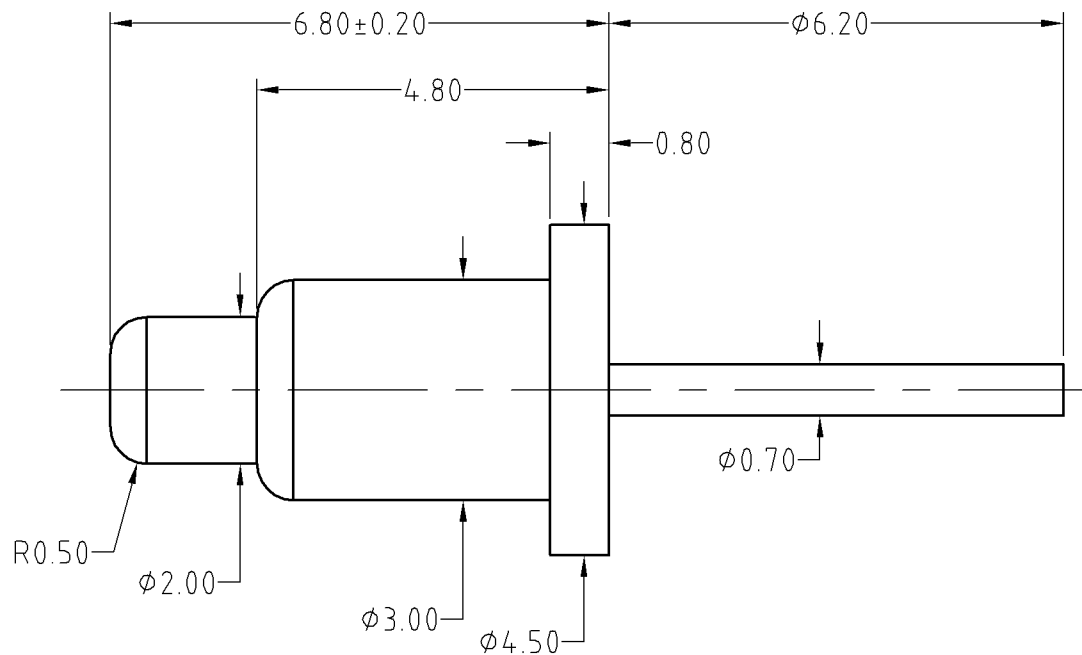
Note:



1.Mechanical demands

- .Contact force: 200g±20% at 1.5mm working stroke
- .Plating plunger: Brass 3u" Au over 50u" Ni.
- .Plating barrel: Brass 1u" Au over 50u" Ni.
- .Plating spring: SUS304 3u" Au

2.Inspection(working stroke)

- .Rated current & voltage: DC12V; 2A
- .Life test: 20,000 cycles
- .测试: 通2A电流持续3分钟, 检测弹簧是否会烧毁
- .压缩要顺畅, 不得有卡死现象



SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 <b>东莞市川富电子有限公司</b> CFE CORPORATION CO.,LTD.					
ANGEL	±1°	A4							
0.000	±0.02					SHEET: 1 of 1			
0.00	±0.05	DRAW				PART NO.	BP00312		
0.0	±0.10	CHECK				FILE NAME	BP00311		
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	TITLE.	Pogo pin connector