

HSF 禁止使用1级环境管理物质

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

Note:

Materials:

.Plunger: Brass 5u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS

Mechanical:


.Contact force: 10g~20g at 3.5mm working stroke


.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 10A Max.

产品3pcs并联通峰值电流5A，长时间稳定电流3.5A端子无发热等不良

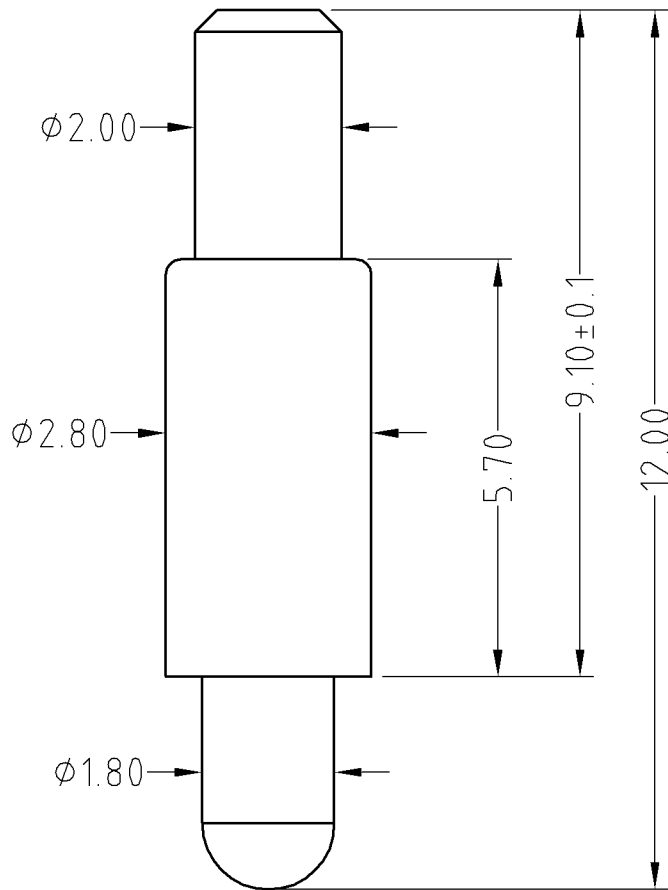

| | | | | | | | |
|--|---------------|---------|--|--|--|---------------|---------|
| SCALE | 10:1 | UNIT:mm | THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION. |  东莞市川富电子有限公司 CFE CORPORATION CO.,LTD. | | | |
| ANGEL | $\pm 1^\circ$ | A4 | | | | SHEET: 1 of 1 | |
| 0.000 | ± 0.02 | | | | | PART NO. | BP01611 |
| 0.00 | ± 0.05 | DRAW | | | | FILE NAME | BP01611 |
| 0.0 | ± 0.10 | CHECK | TITLE | Pogo pin connector | | | |
| GENERAL TOLERANCE UNLESS OTHERWISE NOTED | | APPRO | | | | | |

| | | | | | |
|--------------|-----|------------|-------------|--------|-------|
| _____ | D0 | 2012.03.06 | NEW | | |
| ECN(DCN) NO. | REV | DATE | DESCRIPTION | CHANGE | APPRO |