


HSF 禁止使用1級環境管理物質

Note:

- 1.Mechanical demands
 - 1.Contact force: 60g±15g at 0.7mm working stroke
 - 2.Plating plunger: Brass 20u" Au over 50u" Min. Ni.
Plating barrel: Brass 10u" Au over 50u" Min. Ni.
- 2.Inspection
 - 1.Rated current & voltage: DC12V; 1A
 - 2.Life test: 10,000 cycles
 - 3.Contact resistance: 50 mohm Max. at working stroke

Approve Sign

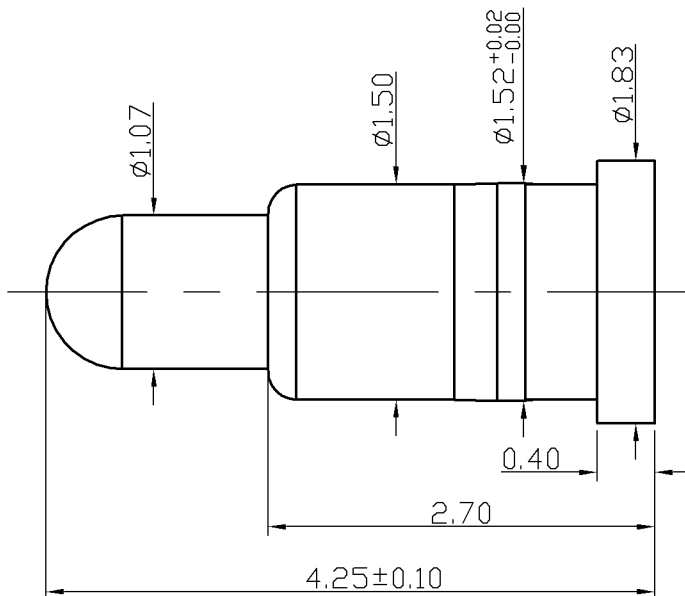

E:\qq\?????.jpg 东莞市川富电子有限公司
DONG GUAN CFE ELECTRONICS CO.,LTD.

Angle	±1°	MAT'L	
0.0000	±0.01	COLOR	
0.000	±0.02	DRAW	Simon 2012.09.13
0.00	±0.05	DESIGN	
0.0	±0.10	CHECK	

TITLE.	Pogo pin
PART NO.	BP02311
FILE NAME	BP02311

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	SCALE	1:1	UNIT:mm	A4	SHEET: 1 of 1
---	-------	-------	-----	---------	----	---------------