

Note:

Materials:

.Plunger: Brass 5u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS surface treatment

Mechanical:

.Contact force: 200g±20% at 1.0mm working stroke


.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.



To ensure the best usage, please operate it based on the working height.  
Based on the engineering drawings, shall not exceed the maximum allowed compression.

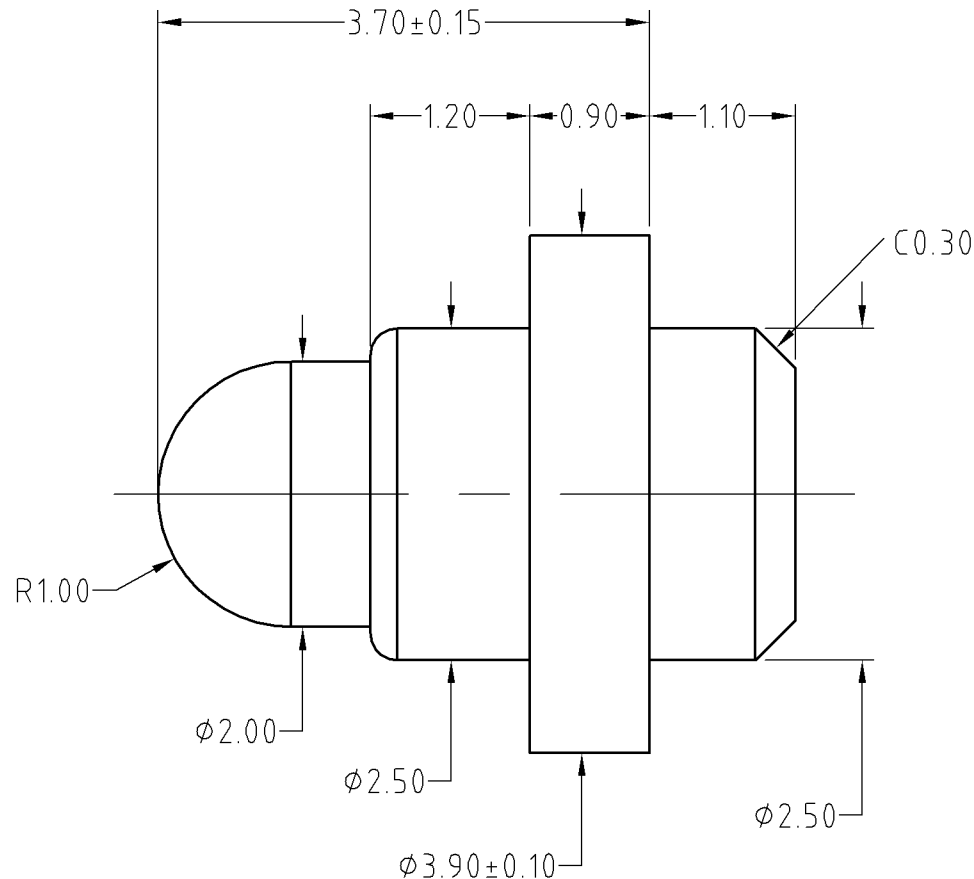

Approve Sign

BOM		
Part	NO.	Qty
Plunger	B024-P1005	1
Barrel	B024-B1003	1
Spring	B024-S9000	1

OLD PART NO.: B394-801G1-2

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 <b>东莞市川富电子有限公司</b> CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0-6	±0.05				SHEET: 1 of 1
6-30	±0.10	DRAW			PART NO.
30-150	±0.15	CHECK	FILE NAME	BP024.11	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	TITLE.	Pogo pin connector	

	A1	2015.10.07	增加旧有料号说明
	A0	2014.04.25	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION