
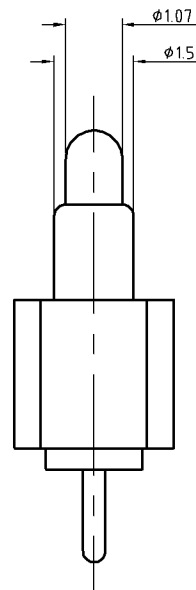
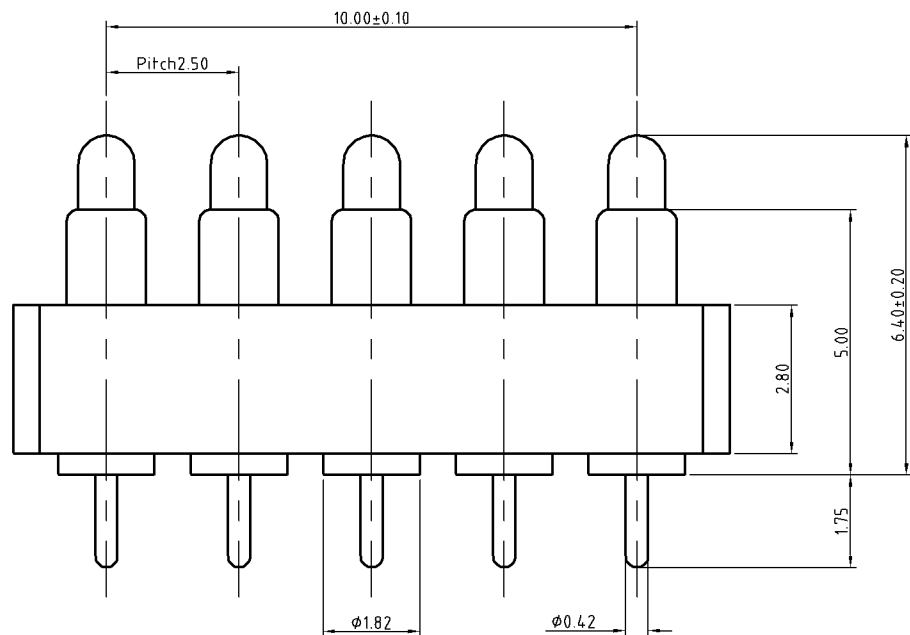


Approve Sign

Note:

1. Mechanical demands
  1. Contact force: 60g Max. at 1.4mm working stroke
  2. Plating plunger: 1u" Au over Ni.
  - Plating barrel: 1u" Au over Ni.
  - Plating spring: 1u" Au over Ni.
2. Inspection
  1. Rated current & voltage: DC15V; 0.05A
  2. Life test: 100,000 cycles
  3. Contact resistance: 5 mohm Max. at working stroke

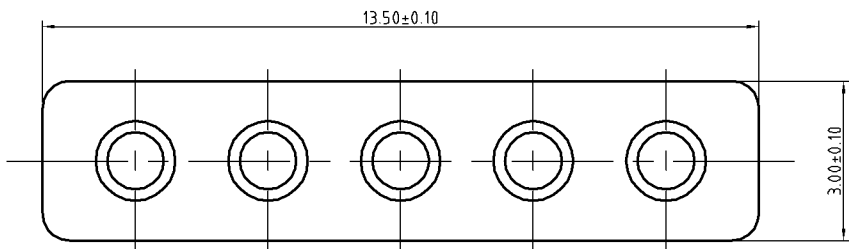

东莞市川富电子有限公司  
DONG GUAN CFE ELECTRONICS CO., LTD.

Angle	±1°	MAT'L	
0.0000	±0.01	COLOR	
0.000	±0.02	DRAW	Simon 2012.09.13
0.00	±0.05	DESIGN	
0.0	±0.10	CHECK	

TITLE.	Pogo pin connector
PART NO.	BP02611-0525001R
FILE NAME	BP02611

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		

SCALE	1:1	UNIT: mm	A4	SHEET: 1 of 1
-------	-----	----------	----	---------------