

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

1.Mechanical demands

1.Contact force: 80g±20% at 0.8mm working stroke

2.Full stroke: 1.2mm

2.Plating plunger: 1u" Au over Ni.


Plating barrel: 1u" Au over Ni.

2.Inspection

1.Rated current & voltage: DC12V; 1A

2.Life test: 10,000 cycles

3.Contact resistance: 50 mohm Max. at working stroke

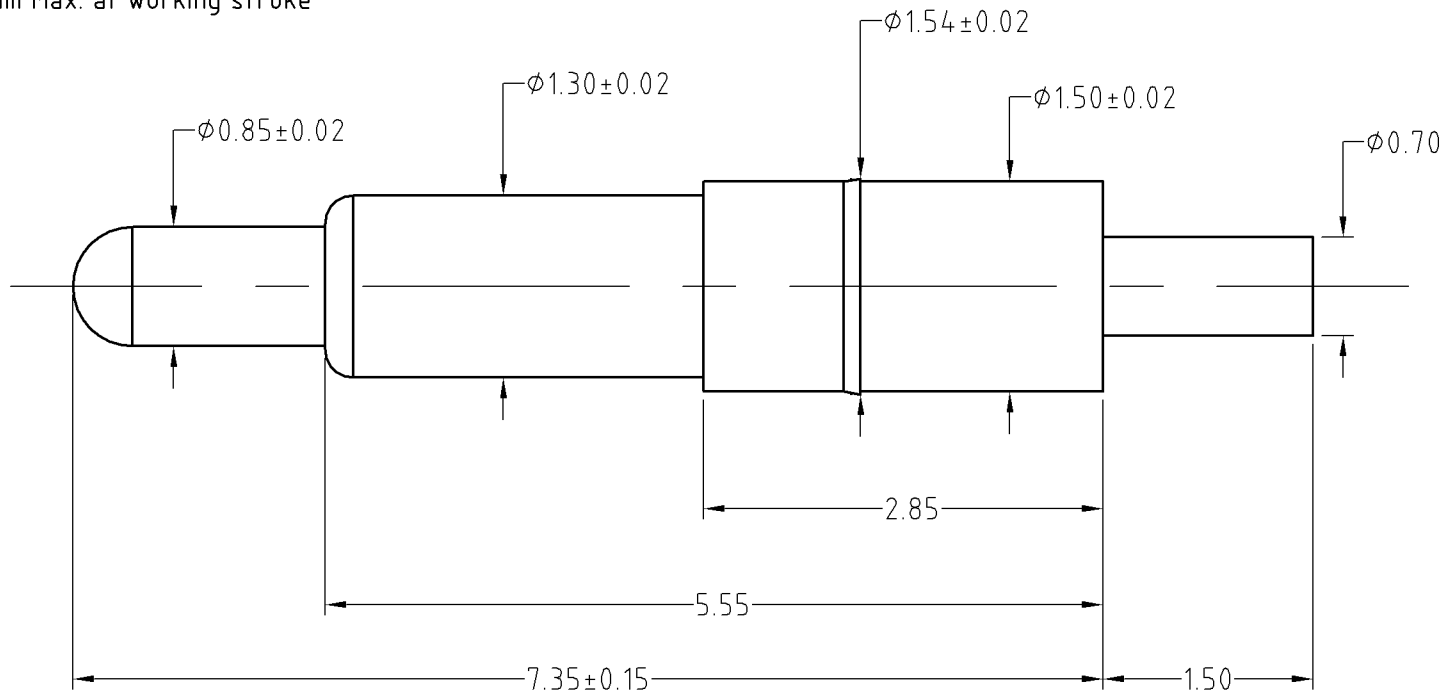

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	川富科技股份有限公司 CFE CORPOPATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02		SHEET: 1 of 1	PART NO.	BP02711
0.00	±0.05	DRAW		FILE NAME	BP02711
0.0	±0.10	CHECK		TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	D0	2012.08.23	NEW	CHANGE	APPRO
REV	DATE	DESCRIPTION	CHANGE	APPRO	