

1

2

3

4

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

1.Mechanical demands

.Contact force: 120g±20% at 2.5mm working stroke

.Plating plunger: Brass Au over Ni.


.Plating barrel: Brass Au over Ni.

.Plating spring: SUS Au

2.Inspection

.Rated current & voltage: DC12V; 5A Max.

.Life test: 100,000 cycles

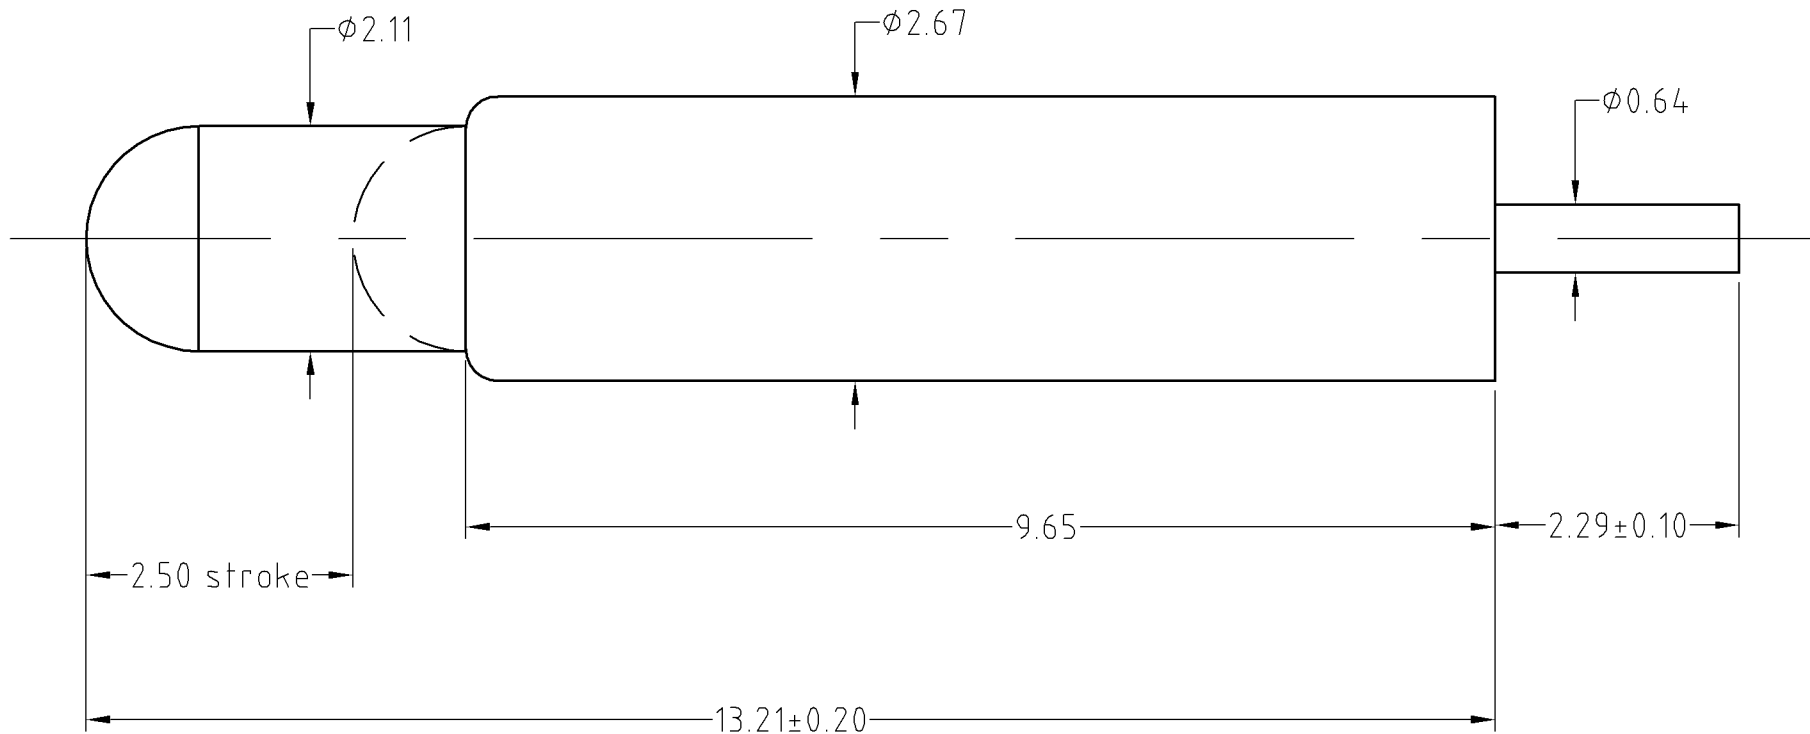

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 川富科技股份有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02				SHEET: 1 of 1
0.00	±0.05	DRAW			PART NO. BP029XX
0.0	±0.10	CHECK	FILE NAME BP02911		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	TITLE. Pogo pin connector		

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		