Note:

Materials:

.Plunger: Brass 3u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS

Mechanical:

.Contact force: 50g Min. at 0.2mm working stroke

.Max. stroke: 0.4mm

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 100 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

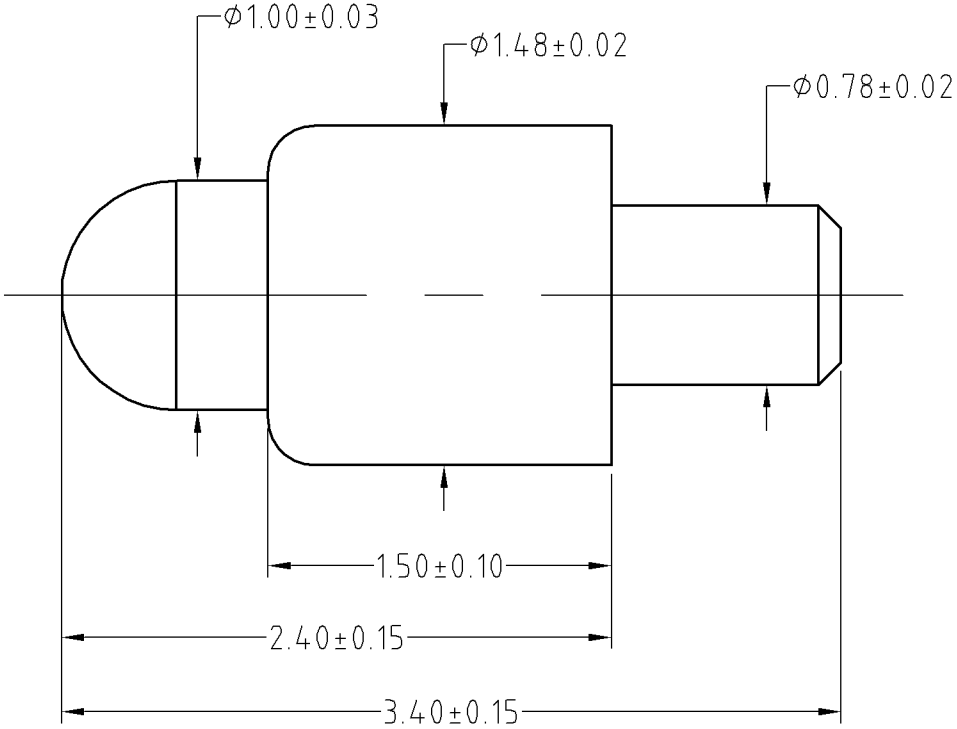

Approve Sign

———	D0	2013.05.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±1°	A4			
0~6	±0.05		SHEET: 1 of 1		
6~30	±0.10	DRAW			PART NO. BP03211
30~150	±0.15	CHECK			FILE NAME BP03211
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE. Pogo pin connector