HSF	禁止使用1級環境管理物質

Note:

1.Mechanical demands

1.Contact force: 190g±40g at 1.3mm working stroke

2.Full stroke: 1.5mm

3.Plating plunger: Brass 5u" Au over 50u" Min. Ni.

Plating barrel: Brass 3u" Au over 50u" Min. Ni.

Plating spring: SUS 1u" Au

2.Inspection

1.Rated current & voltage: DC12V; 2A

2.Life test: 10,000 cycles

3.Contact resistance: 50 mohm Max. at working stroke

Approve Sign

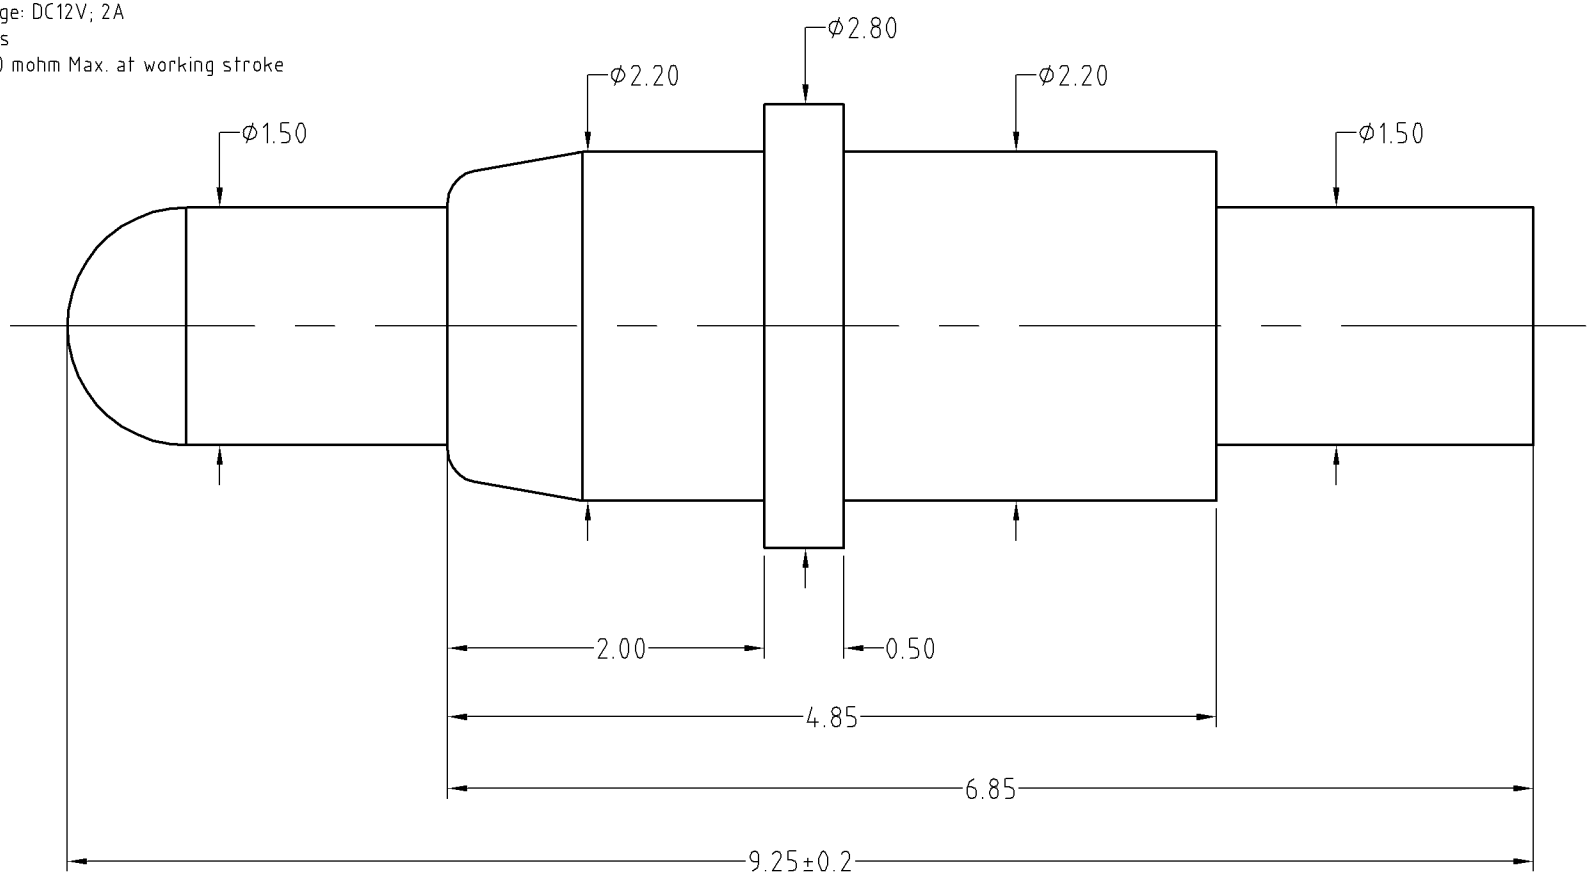

Angle	±1°	MAT'L	
0.0000	±0.01	COLOR	
0.000	±0.02	DRAW	
0.00	±0.05	DESIGN	
0.0	±0.10	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

TITLE.	Pogo pin
PART NO.	BP03433
FILE NAME	BP03411

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	D0	2012.08.23	NEW		

SCALE 1:1 | UNIT: mm | A4 | SHEET: 1 of 1

THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

091210-BI051