

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plunger: BeCu 10u" Au over 50u" Ni

.Barrel: Brass 20u" Au over 50u" Ni

.Spring: SUS 1u" Au


Mechanical:

.Contact force: 35g±10g at 0.7mm working stroke

.Life test: 20,000 cycles

Electrical(working stroke):

.Rated current & voltage: DC 4V; 15mA

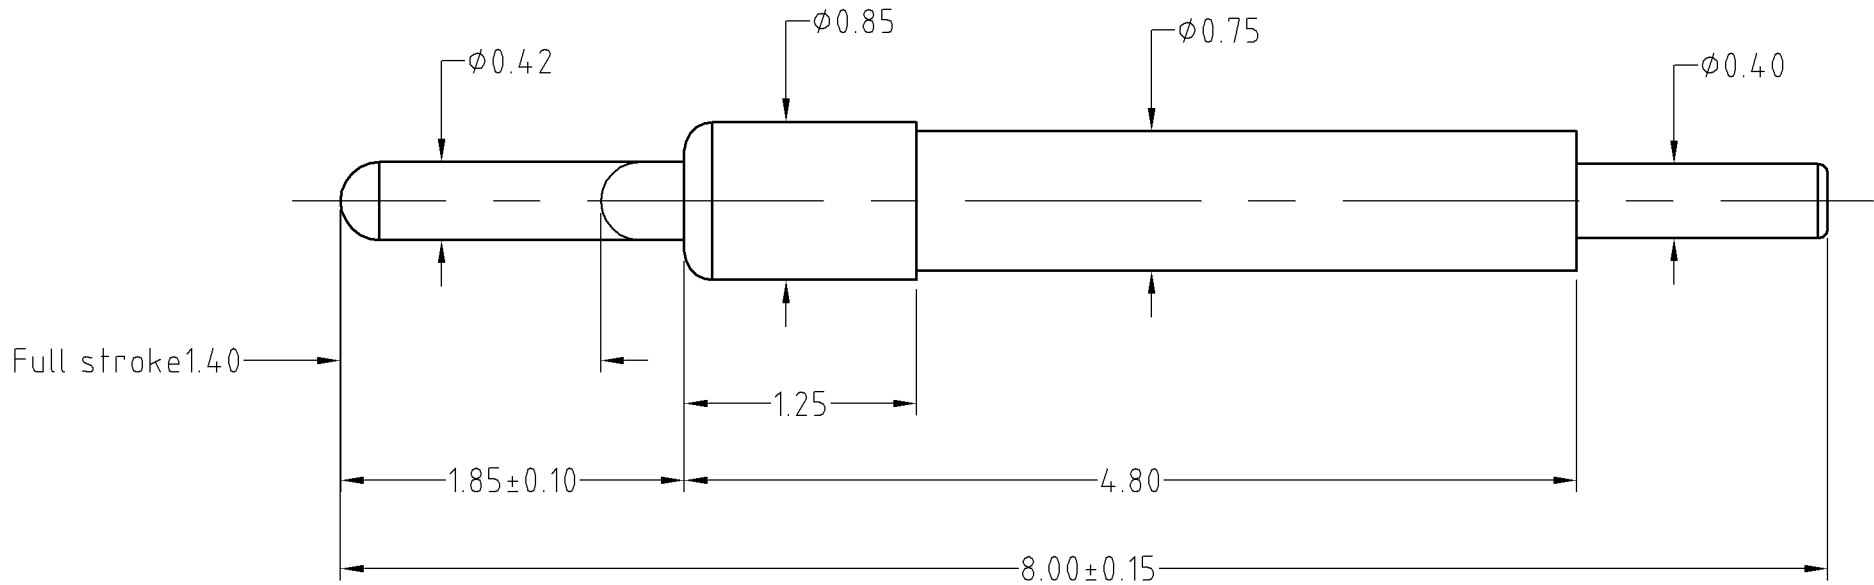

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	$\pm 1^\circ$	A4	SHEET: 1 of 1	
0.000	$\pm 0.02$		PART NO. BP03806	
0.00	$\pm 0.05$	DRAW	FILE NAME BP03811	
0.0	$\pm 0.10$	CHECK	TITLE. Pogo pin connector	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO			

**CFE** 东莞市川富电子有限公司  
CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	A0	2013.07.17	NEW		