

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:


- .Plunger: Brass 10u" Au over 50u" Ni
- .Barrel: Brass 15u" Au over 50u" Ni
- .Spring: SUS insulate coating

Mechanical:

- .Contact force: 60g±15g at 0.7mm working stroke
- .Life test: 20,000 cycles

Electrical(working stroke):

- .Rated current & voltage: DC12V; 5A
- .Contact resistance: 50 milliohm Max.

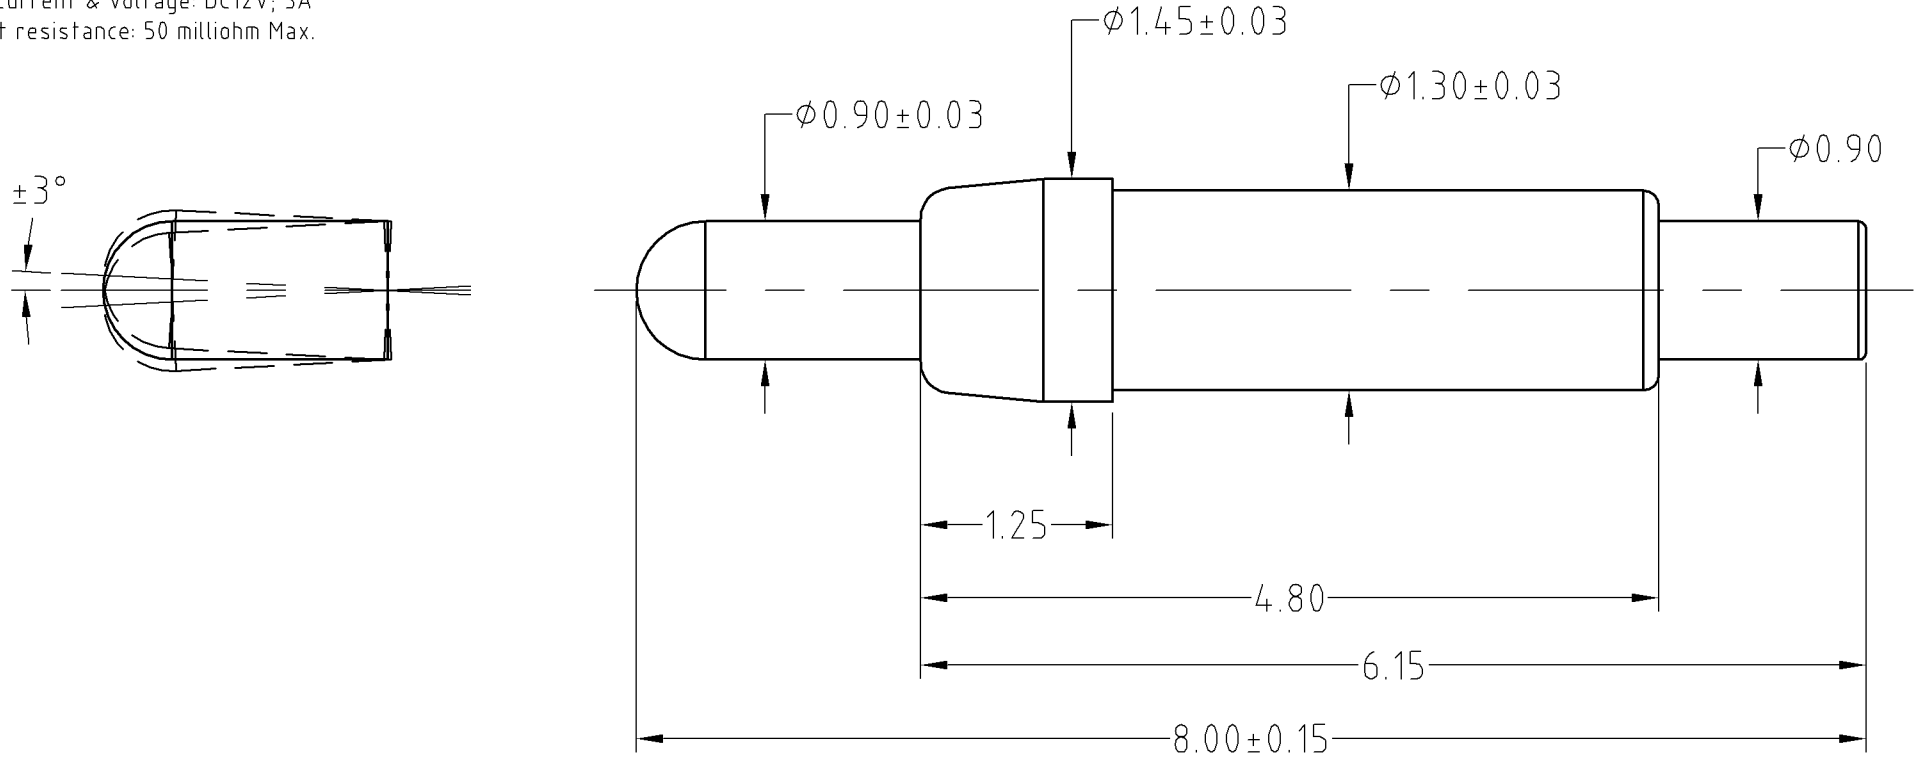

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	<b>CFE</b> 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.					
ANGEL	±1°	A4							
0.000	±0.02				SHEET: 1 of 1				
0.00	±0.05	DRAW							
	0.0	±0.10	CHECK	PART NO. BP03811					
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	TITLE.	Pogo pin connector

1

2

3

4

A

B

C

D