

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:


- .Plunger: Brass 10u" Au over 50u" Ni
- .Barrel: Brass 15u" Au over 50u" Ni
- .Spring: SUS insulate coating

Mechanical:

- .Contact force: 60g±15g at 0.7mm working stroke
- .Life test: 20,000 cycles

Electrical(working stroke):

- .Rated current & voltage: DC12V; 5A
- .Contact resistance: 50 milliohm Max.

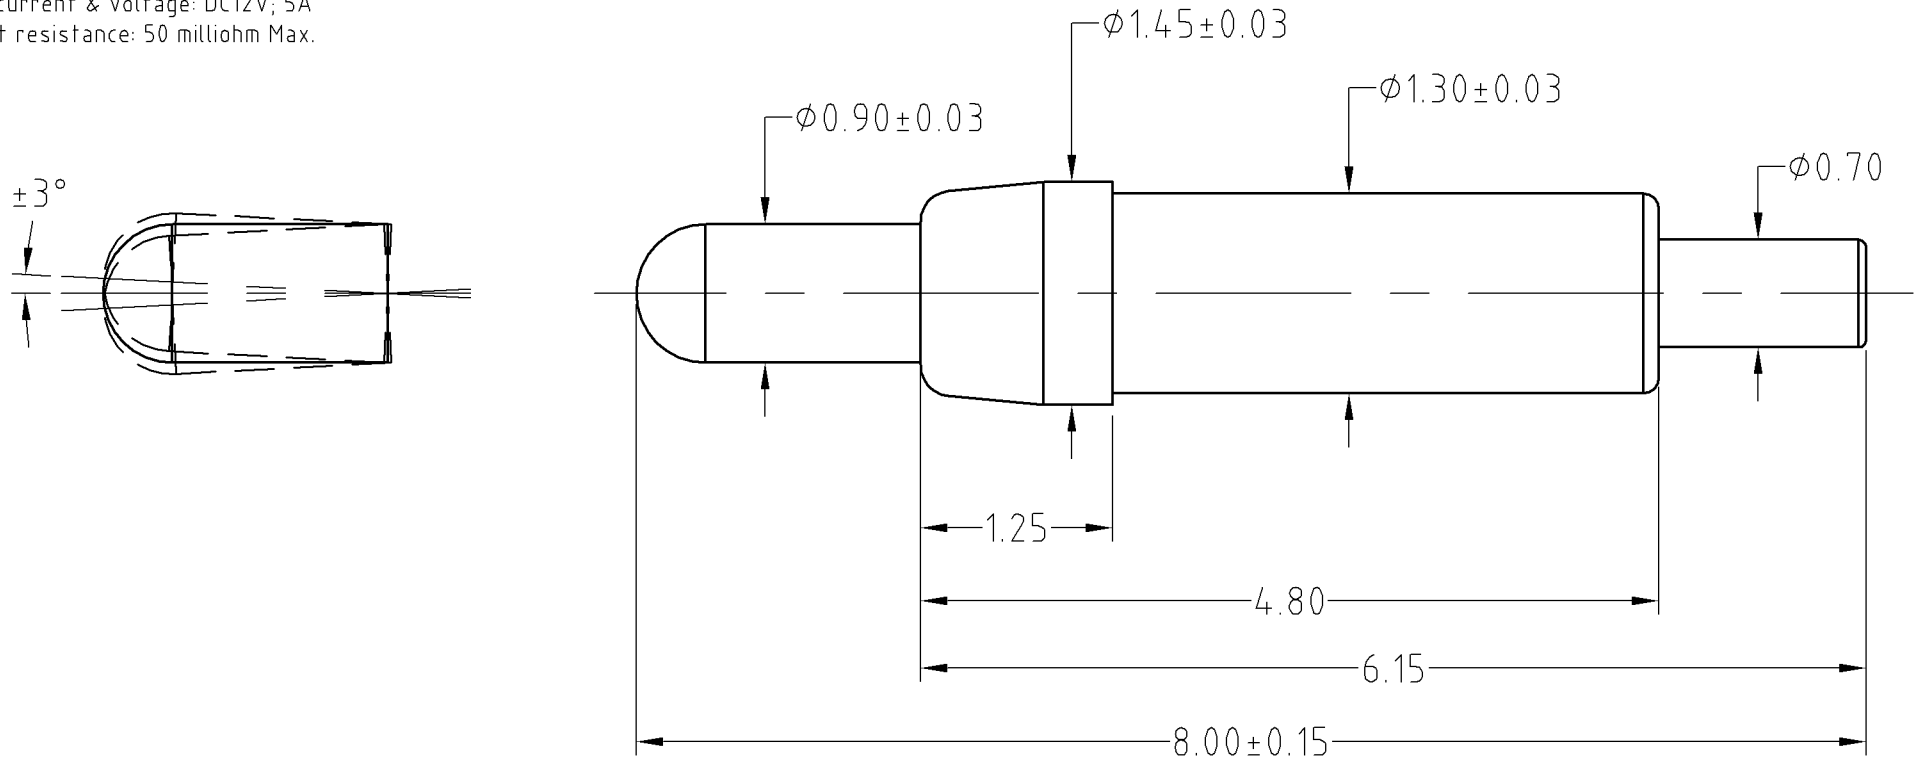

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±1°	A4	SHEET: 1 of 1	
	±0.02			
	±0.05	DRAW		
	±0.10	CHECK		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

		东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
PART NO.	BP03821	FILE NAME	BP03811
TITLE.	Pogo pin connector		

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	A0	2013.07.17	NEW		