


IISF 禁止使用1级环境管理物质

Note:

1. Mechanical demands
  - Contact force: 130g±20% at 1.5mm working stroke
  - Full stroke: 2.0mm
  - Plating plunger: Brass 3u" Au over 50u" Ni.
  - Plating barrel: Brass 3u" Au over 50u" Ni.
  - Spring: SUS304
2. (working stroke)
  - Rated current & voltage: DC12V; 1A
  - Life test: 10,000 cycles
  - Contact resistance: 100 mohm Max.

Part	NO.	Qty
Barrel	B065-B1003	1
Plunger	B065-P1003	1
Spring	B065-S01	1

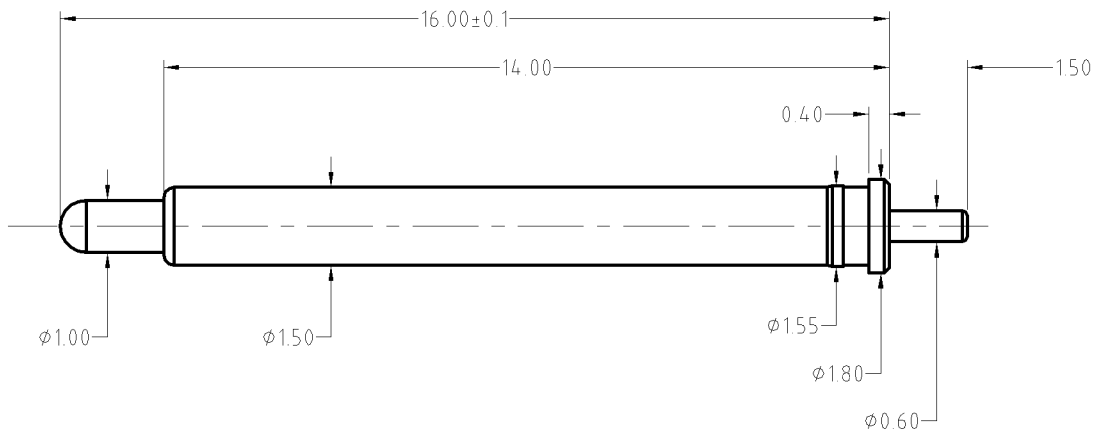

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION, LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGLE	±1°	A4	
0.000	±0.02		
0.00	±0.05	DRAW	
0.0	±0.10	CHECK	SHEET: 1 of 1

ECN/DCN/NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	PART NO.	FILE NAME	TITLE
		2013.05.30	NEW					BP06511	BP06511	Paga pin connector