

HSF 禁止使用1級環境管理物質

Note:


1.Mechanical demands

- 1.Contact force: 150g±20% at 1.0mm working stroke
- 2.Full stroke: 2.0mm
- 3.Plating plunger: Brass 3u" Au over 50~100u" Ni.
- Plating barrel: Brass 3u" Au over 50~100u" Ni.
- Plating spring: SUS 1u" Au

2.Inspection(working stroke)

- 1.Rated current & voltage: DC12V; 5A
- 2.Life test: 20,000 cycles
- 3.Contact resistance: 50 mohm Max.

Approve Sign

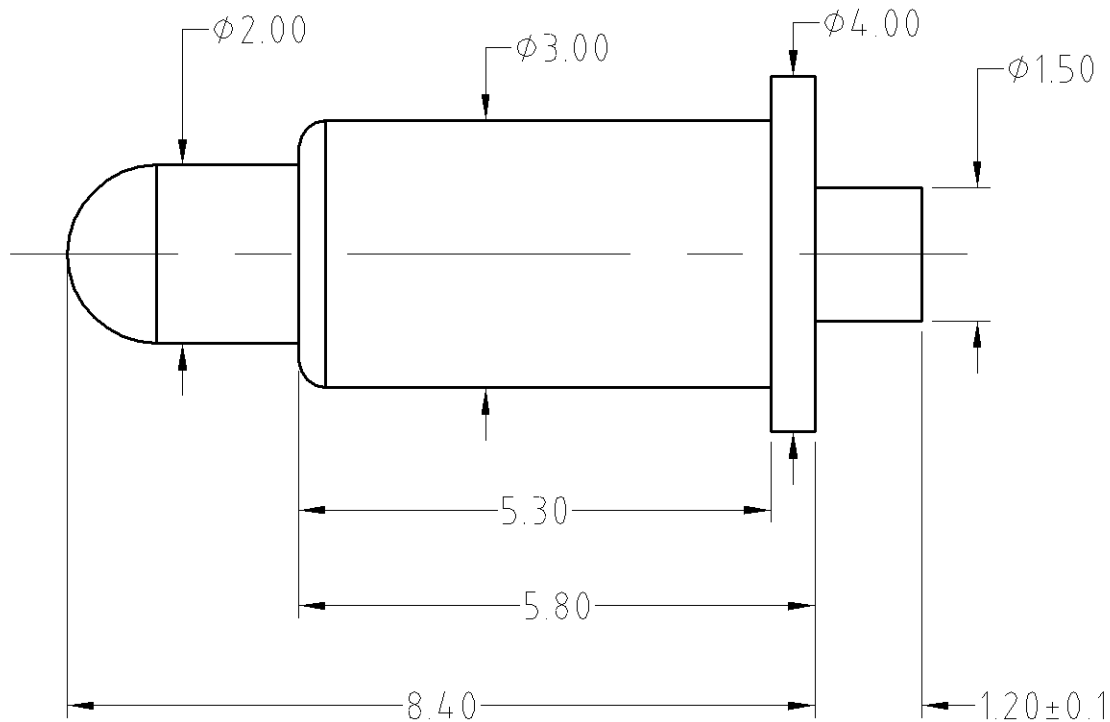

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	$\pm 1^\circ$	A4	
0.000	$\pm 0.02$		
0.00	$\pm 0.05$	DRAW	
0.0	$\pm 0.10$	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

东莞市川富电子有限公司  
CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	DO	2012.08.23	NEW		
REV	DATE		DESCRIPTION	CHANGE	APPRO

PART NO.	BP06612
FILE NAME	BP06611
TITLE.	Page pin connector

SHEET: 1 of 1