

HSF 禁止使用1級環境管理物質

Approve Sign


Note:

1.Mechanical demands

- 1.Contact force: 80g±20g at 1.0mm working stroke
- 2.Plating plunger: Brass 1u" Au over 50 Ni.
- Plating barrel: Brass 1u" Au over 50 Ni.
- Plating spring: SUS 1u" Au

2.Inspection(working stroke)

- 1.Rated current & voltage: DC12V; 1.5A Max.
- 2.Life test: 10,000 cycles
- 3.Contact resistance: 40 mOhm Max.

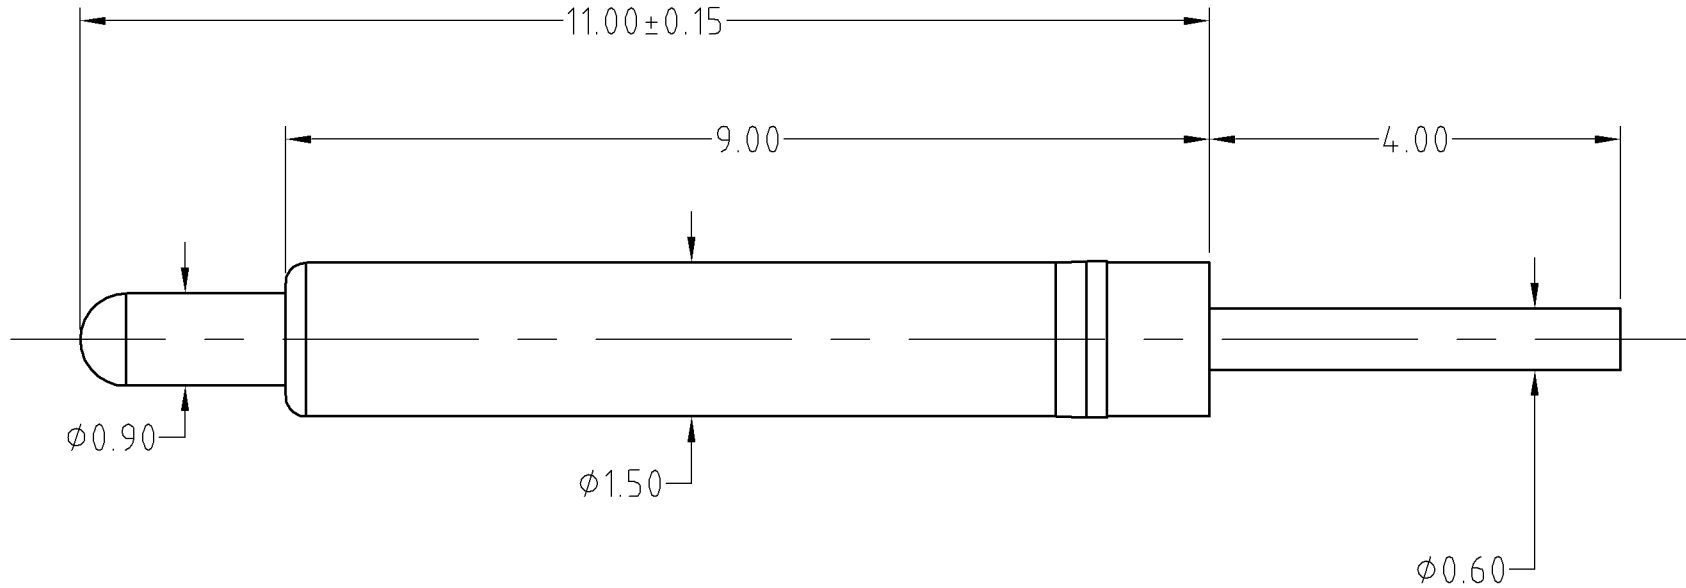

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.						
ANGEL	±1°	A4	SHEET: 1 of 1						
0.000	±0.02								
0.00	±0.05	DRAW		PART NO. BP07311					
0.0	±0.10	CHECK		FILE NAME BP07311					
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	TITLE.	Pogo pin connector