

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

1.Mechanical demands

1.Contact force: 120g±20% at 1.5mm working stroke

2.Plating plunger: Brass 15u" Au over 50u" Ni.


Plating barrel: Brass 5u" Au over 50u" Ni.

2.Inspection(working stroke)

1.Rated current & voltage: DC12V; 1A

2.Life test: 20,000 cycles

3.Contact resistance: 50 mohm Max.

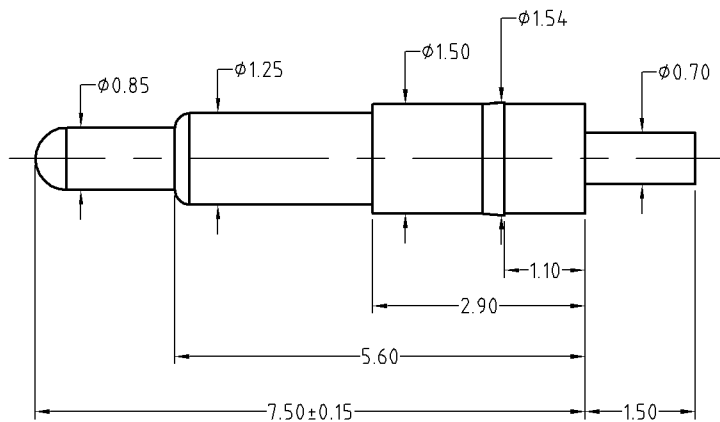

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	川富科技股份有限公司 CFE CORPOPATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02		SHEET: 1 of 1	PART NO.	BP07611
0.00	±0.05	DRAW		FILE NAME	BP07611
0.0	±0.10	CHECK		TITLE	Pago pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		