

HSF 禁止使用1级环境管理物质

Approve Sign


Note:

1.Mechanical demands

- 1.Contact force: 220g±20% at 1.0working stroke
- 2.Plating plunger: Brass 3u" Au over 50u" Ni.
- Plating barrel: Brass 3u" Au over 50u" Ni.

2.Inspection(working stroke)

- 1.Rated current & voltage: DC12V; 2.5A
- 2.Life test: 20,000 cycles
- 3.Contact resistance: 50 mohm Max.

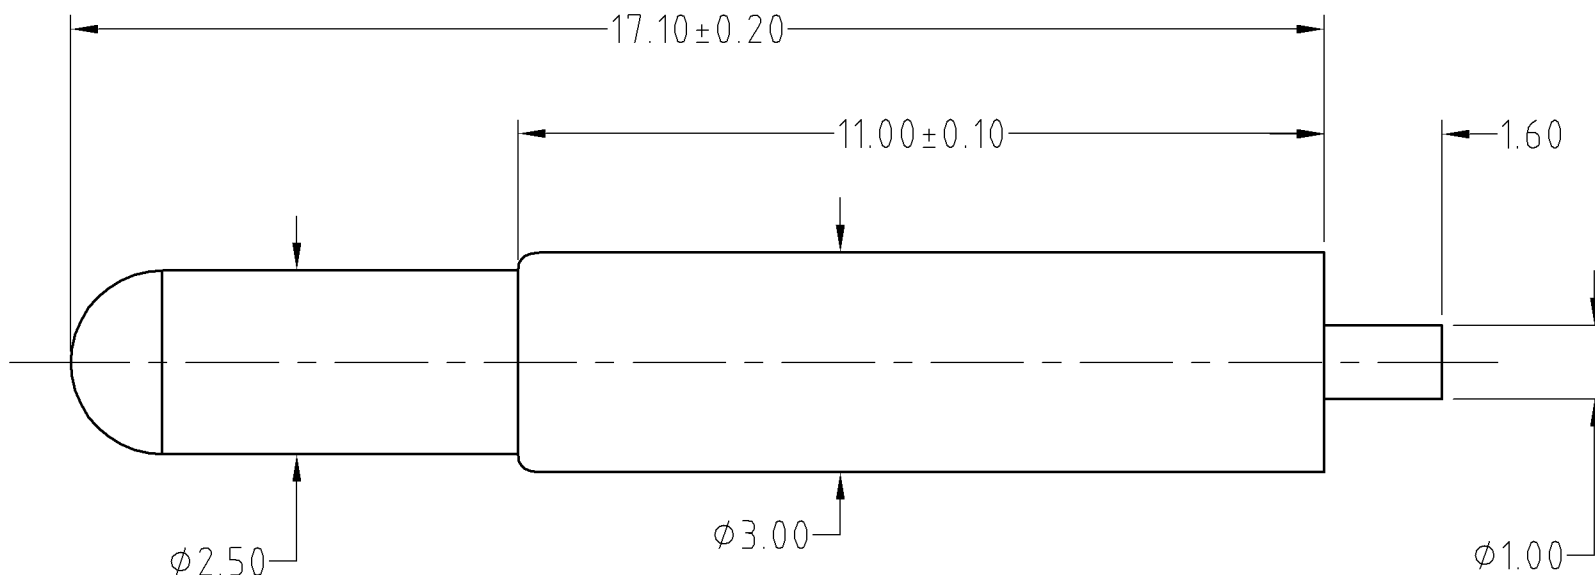

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	SHEET: 1 of 1
ANGEL	±1°	A4		
0.000	±0.02			
0.00	±0.05	DRAW		
0.0	±0.10	CHECK		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO			

		东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
PART NO.	BP08011		
FILE NAME	BP08011		
TITLE.	Pogo pin connector		

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2012.08.23	NEW		