

HSF 禁止使用1级环境管理物质

Approve Sign


Note:

1.Mechanical demands



- .Plating plunger: Brass 30u" Au over 120u" Ni.
- .Plating barrel: Brass 30u" Au over 120u" Ni.
- .Spring: SUS304 insulate coating

2.Inspection(working height)

- .Rated current & voltage: DC12V; 4A
- .Life test: 30,000 cycles
- .Contact resistance: 100 mohm Max.

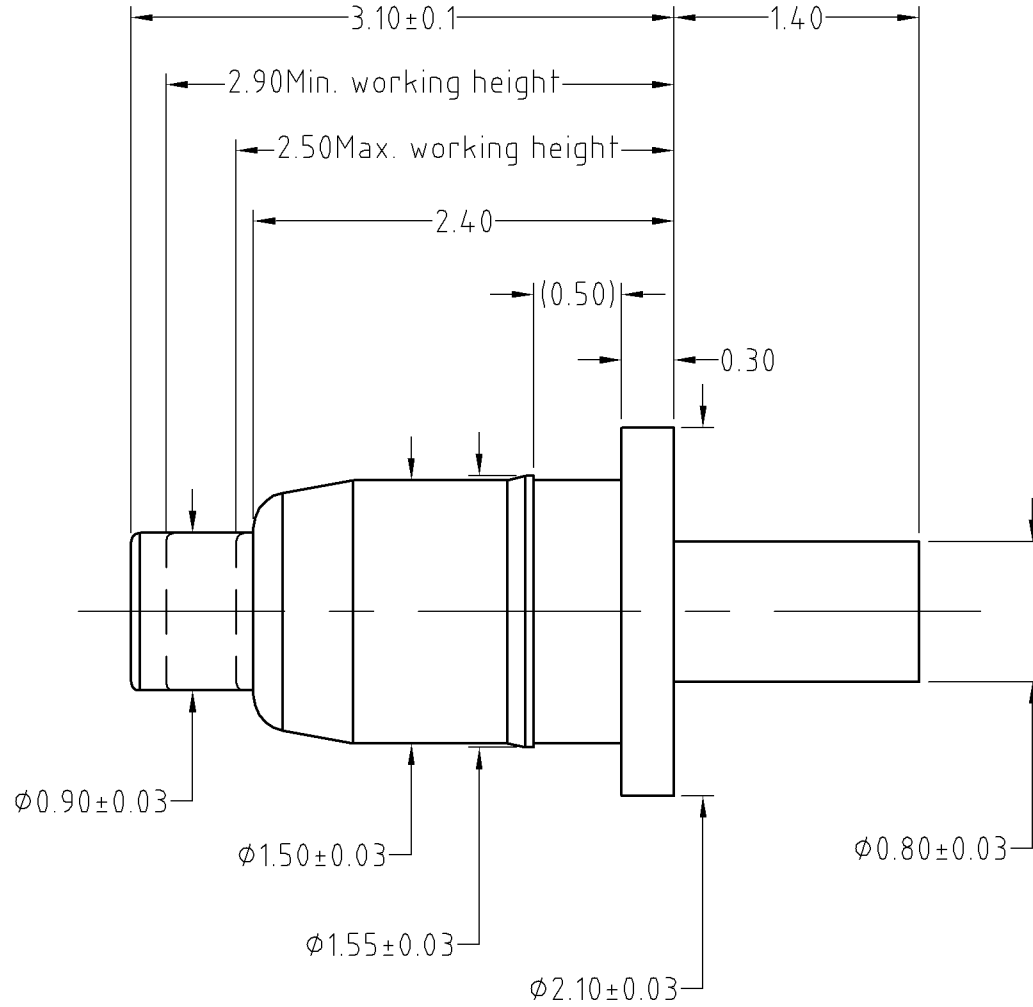

working height	spring force
2.9mm Min.	40g Min.
2.5mm Min.	80g Max.

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.			
ANGEL	±1°	A4					
0.000	±0.02	 SHEET: 1 of 1					
0.00	±0.05	DRAW					
0.0	±0.10	CHECK					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO						
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	TITLE	Pogo pin connector

	D0	2012.08.23	NEW				
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO		

PART NO.	BP08716
FILE NAME	BP08711