

HSF 禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plunger: Brass 10u" Au over 50u" Ni

.Barrel: Brass 10u" Au over 50u" Ni

.Spring: SUS

Mechanical:


.Contact force: 120g±20% at 7.2mm working height

.Life test: 100,000 cycles (1~2mm stroke)

Electrical:

.Rated current & voltage: DC 50V; 1A

.Contact resistance: 50 milliohm Max.

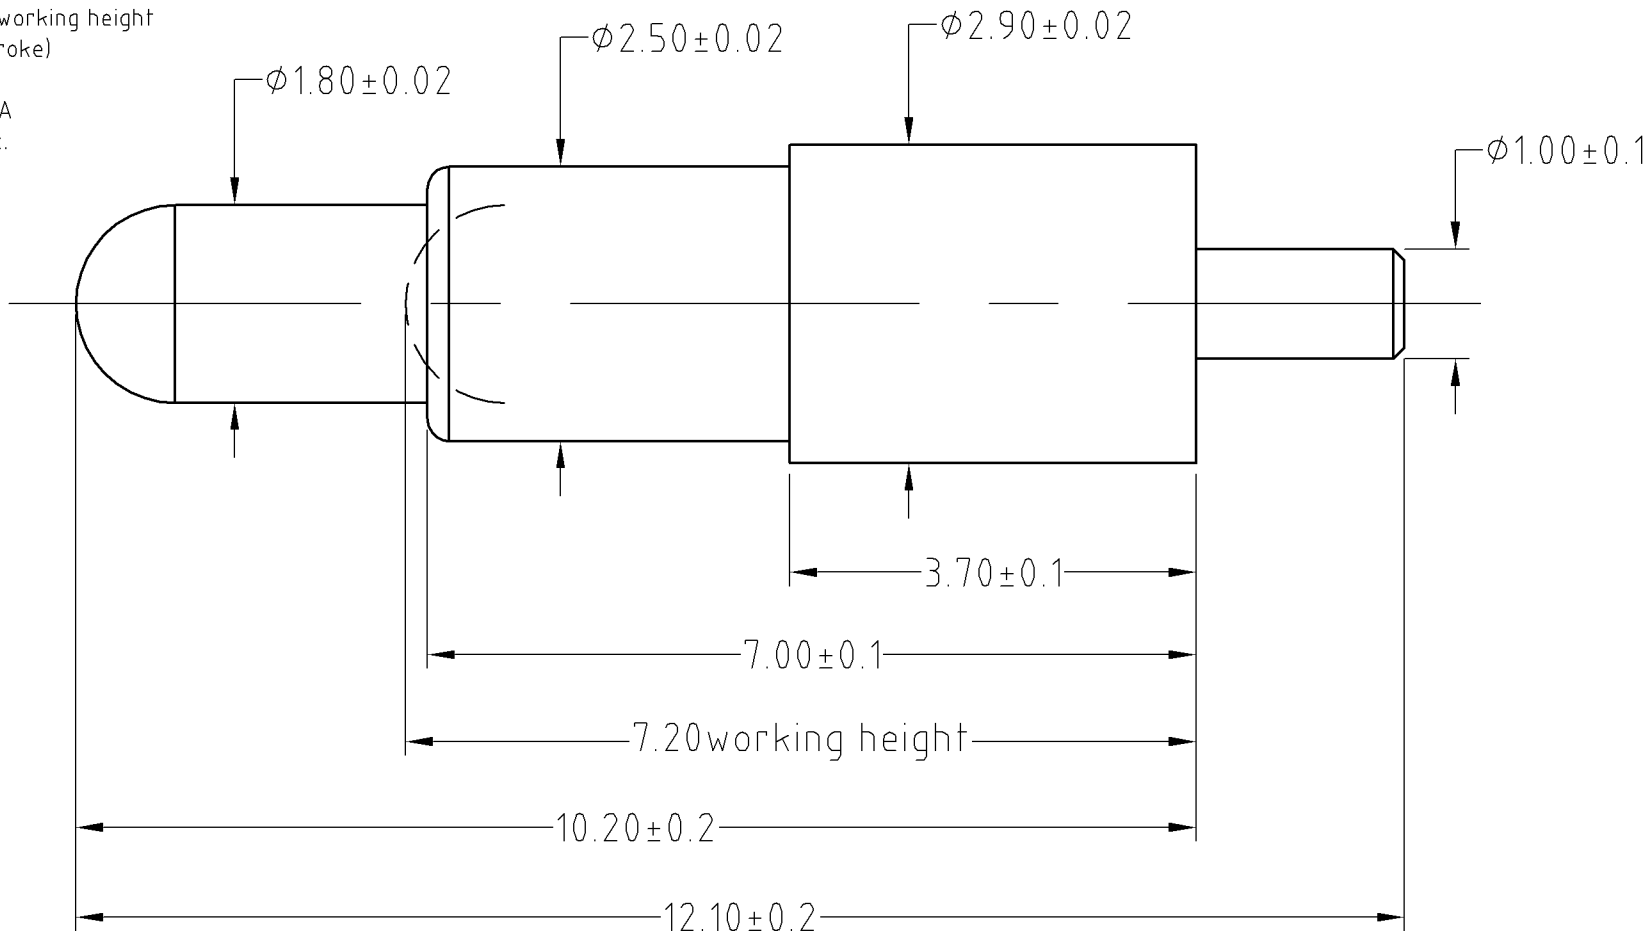

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	SHEET: 1 of 1	PART NO.	BP094.11
ANGEL	±1°	A4				
0.000	±0.02					
0.00	±0.05	DRAW				
0.0	±0.10	CHECK				
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO				TITLE.	Pogo pin connector

CFE 东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2013.07.06	NEW		