

HSF 禁止使用1级环境管理物质

Note:

Materials:

.Plunger: Brass 10u" Au over 50u" Ni

.Barrel: Brass 10u" Au over 50u" Ni

.Spring: SUS

Mechanical:

.Contact force: 140g±20% at 3.6mm working height


.Life test: 10,000 cycles



Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

Part	NO.	Qty
Plunger	B004-P1015	1
Spring	B004-S01	1
Barrel	B004-B1005	1

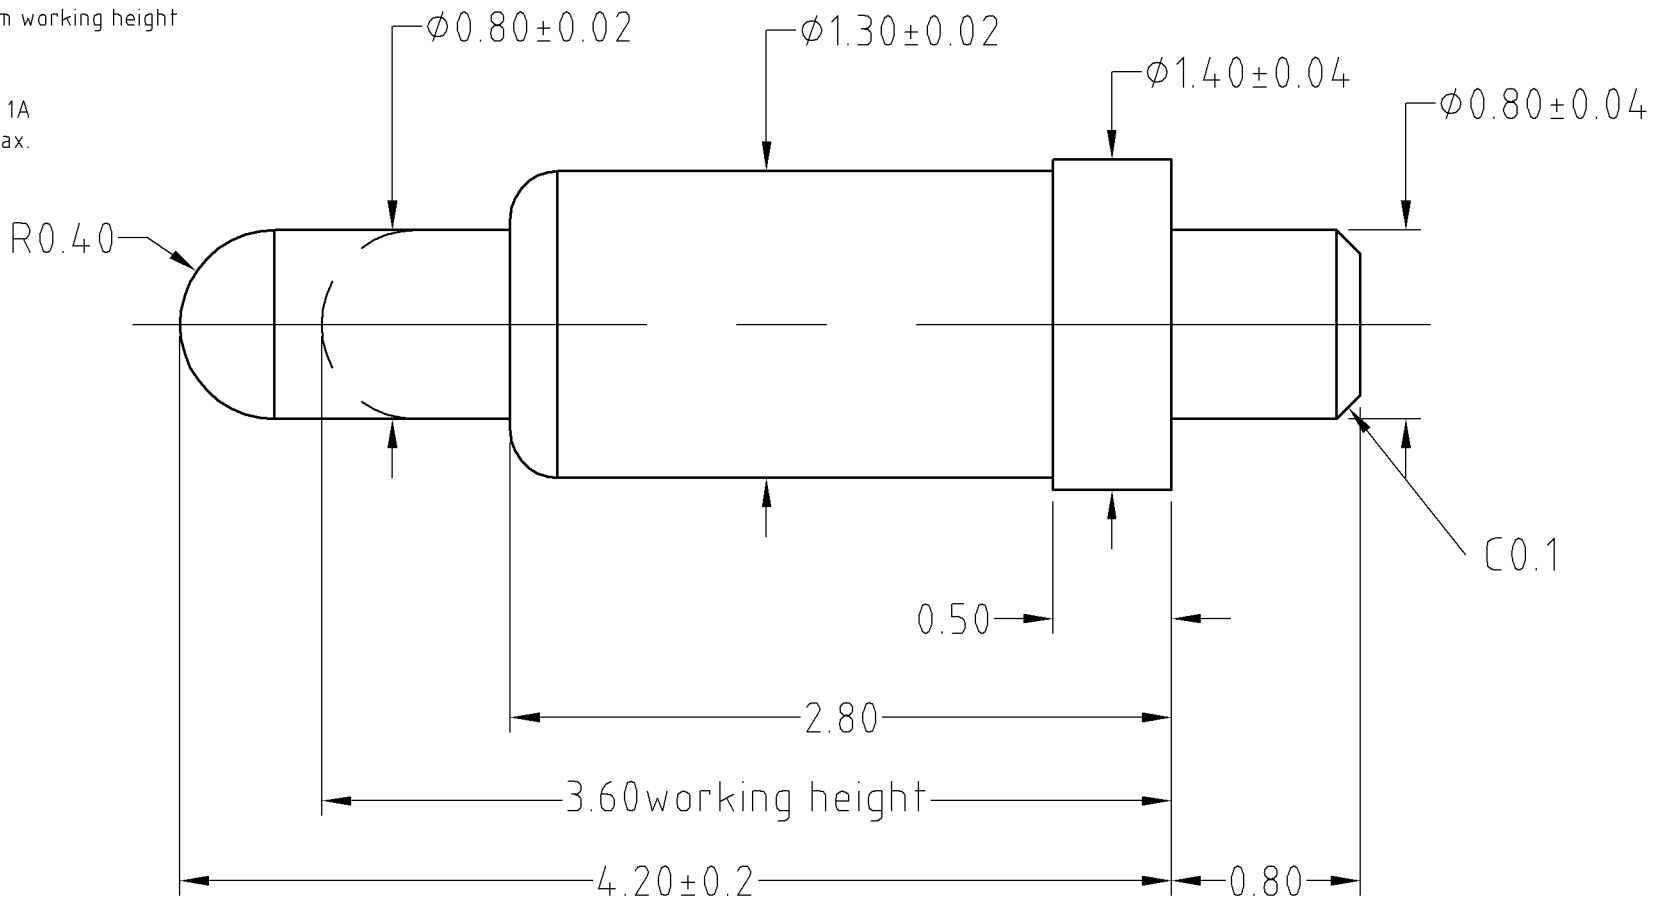

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	SHEET: 1 of 1	 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.		
ANGEL	±1°	A4					
0.000	±0.02						
0.00	±0.05	DRAW					
0.0	±0.10	CHECK					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO				PART NO.	BP10311	
					FILE NAME	BP10311	
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
	D0	2013.07.06	NEW		