

1

2

3

4

Note:

Materials:

.Plunger: Brass 5u" Au over Ni

.Barrel: Brass 5u" Au over Ni

.Spring: SUS

Mechanical:

.Contact force: 100g±20g at working height

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 2A Max.


.Contact resistance: 50 milliohm Max.

RoHS compliant

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

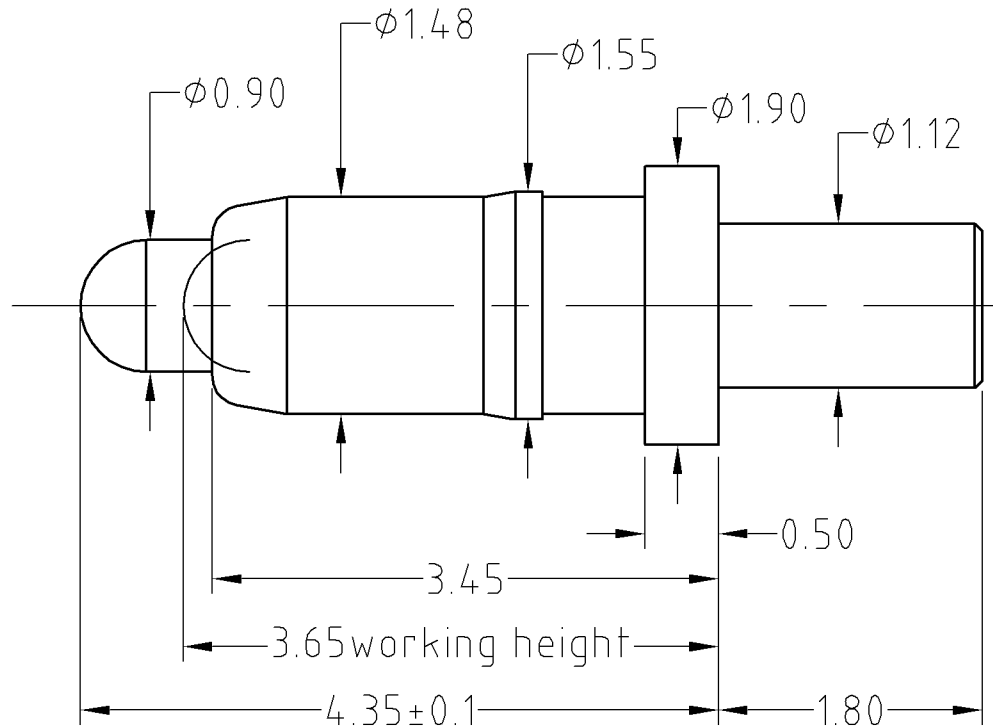

_____	A1	2014.04.11	change $\phi 1.10$ to $\phi 1.12$
_____	A0	2013.12.23	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	$\pm 1^\circ$	A4	SHEET: 1 of 1	
0~6	± 0.05		PART NO. BP12611	
6~30	± 0.10	DRAW	FILE NAME BP12611	
30~120	± 0.15	CHECK	TITLE. Pogo pin connector	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

