

Note:

Materials:

.Plunger: Brass 20u" Au over Ni

.Barrel: Brass 10u" Au over Ni

.Spring: SUS

Mechanical:

.Contact force: 44g±20% at 0.55mm working stroke

.Full stroke: 1.25mm

.Life test: 50,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 2A

.Contact resistance: 50 milliohm Max.



Product plating hole sealing process

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

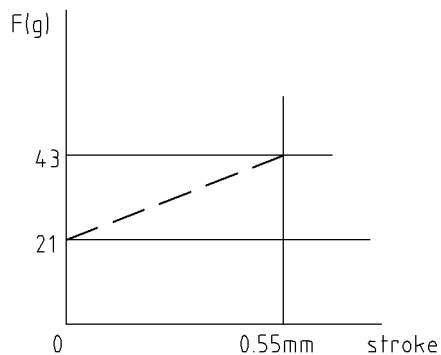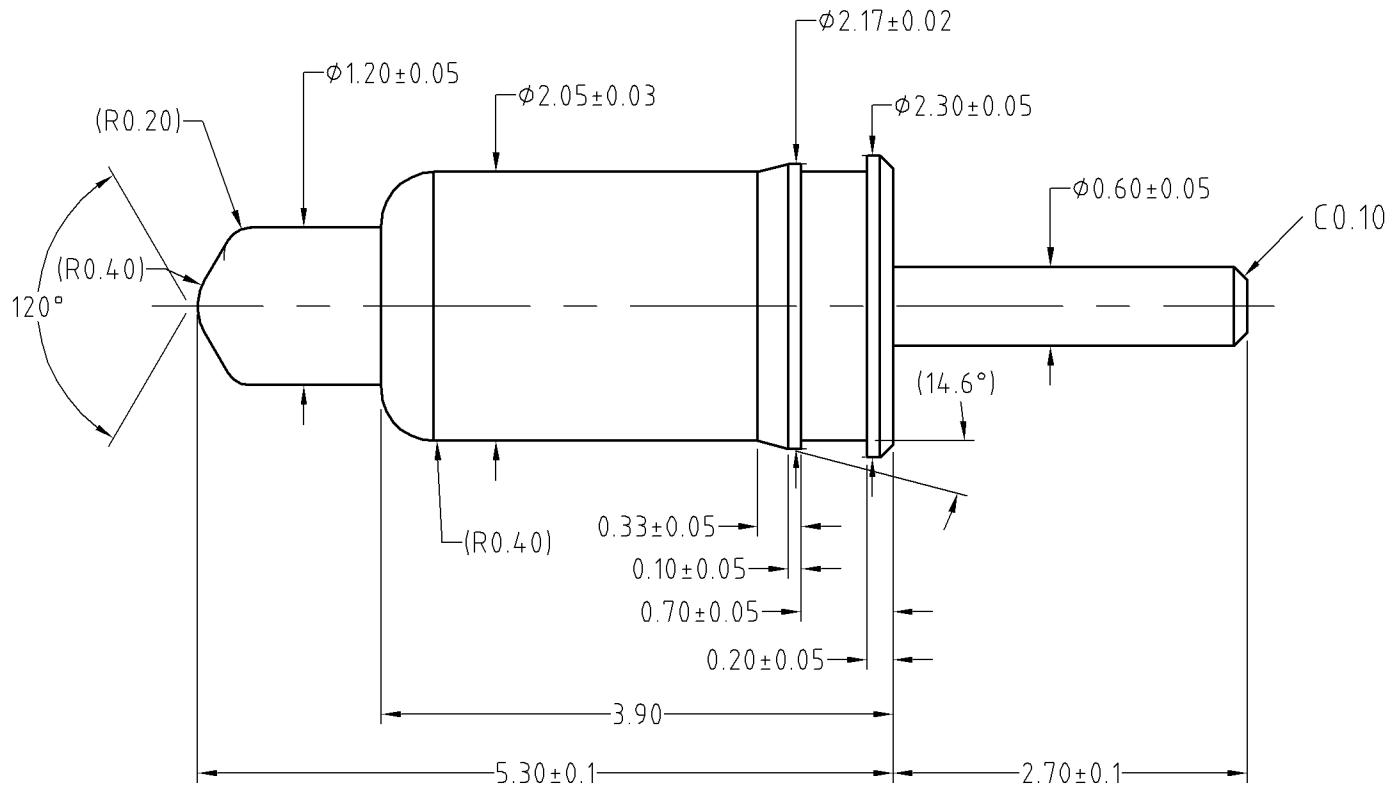

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±1°	A4	SHEET: 1 of 1	
0~6	±0.05		PART NO.	BP14-811
6~30	±0.10	DRAW	FILE NAME	BP14-8XX
30~150	±0.15	CHECK	TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		



ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A0	2014.02.11	NEW