

**Mechanical Performances:**<机械性能>

.spring force: 80g±20g at 1.0mm working stroke  
 <单针弹力: 在工作行程1.0mm 弹力80g±20g>  
 .Mechanical Life : 20,000 cycles  
 <机械寿命: 20,000次>

**Electrical Performances:**<电气性能>

.Rated current & voltage: DC12V; 1A Max.  
 <额定电压&电流: DC12V; 1A Max>  
 .Contact resistance: 50 milliohm Max.  
 <接触电阻: 50毫欧最大 >  
 .When the current is more than 1A, then need to add the delay circuit(3 second)to it.  
 <当电流大于1A时, 则需要增加延时电路(3秒)>

**Environment performances:**<环境性能>

.Operating Temp:-40 to +105°C  
 <工作温度范围: -40 to +105°C>  
 .Resistance to Solder heat: 260°C±5° 20s±2s  
 <焊锡耐热性: 260°C±5° 20s±2s>  
 .Salt spray:48h  
 <盐雾测试48小时>  
 .Unmarked deviation Angle: ±3°  
 <未标注偏差角: ±3° >  
 .Critical dimension:★  
 <重点尺寸: ★>  
 .RoHS compliant product  
 <符合RoHS 产品>


To ensure the best usage, please operate it based on the working height.

为确保最佳使用, 请根据工作高度进行操作。

Based on the engineering drawings, shall not exceed the maximum allowed compression  
根据工程图纸, 不应超过允许的最大压缩量。

Customer  
Signature

东莞市川富电子有限公司  
 DONGGUAN CFE ELECTRONIC CO.,LTD  
 文件受控章  
 DOCUMENT CONTROLLED

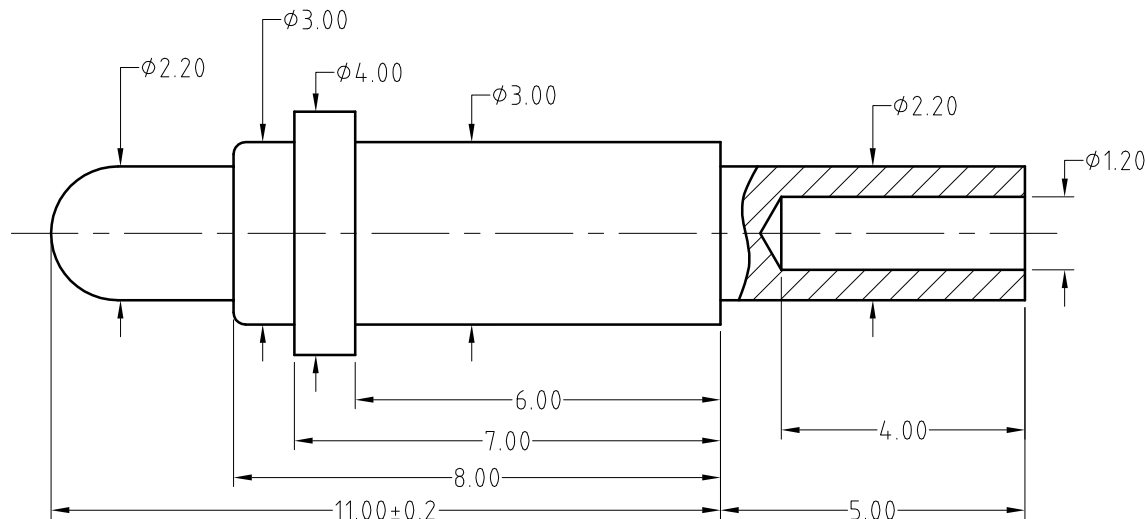

Spring: SUS304 Au <弹簧: 不锈钢304 表面镀金>	B161-S01	1
Plunger: Brass C3604 0.075um Au over 1.25~2.5um Ni <针轴: 黄铜C3604 底层镀镍1.25~2.5um 表面镀金0.075um>	B161-P1003	1
Barrel: Brass C3604 0.075um Au over 1.25~2.5um Ni <针管: 黄铜C3604 底层镀镍1.25~2.5um 表面镀金0.075um>	B161-B1003	1
<Specification> 规格	<P/N>料号	<Qty>数量

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±2°	A4		
0-6	±0.05		SHEET: 1 of 1	
6-30	±0.10	DRAW	Laura	
30-150	±0.15	CHECK	Michael	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	Simon	

**CFE**® 弹簧针磁吸连接器解决方案商  
 Pogo Pin Magnetic Connector Solutions

PART NO.	BP16101
FILE NAME	BP161XX
TITLE.	Pogo pin/弹簧针

A0	2014.03.08	New Release 新发行
REV	Date 日期	Description 描述