

1

2

3

4

Note:

Materials:

.Plunger: Brass 3u" Au over Ni

.Barrel: Brass 3u" Au over Ni

.Spring: SUS surface treatment

Mechanical:

.Contact force: 100g±20g at 2.0mm working stroke

.Full stroke: 6.0mm

.Life test: 20,000 cycles

Electrical:


.Rated current & voltage: DC 12V; 2A

.Contact resistance: 50 milliohm Max.


To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

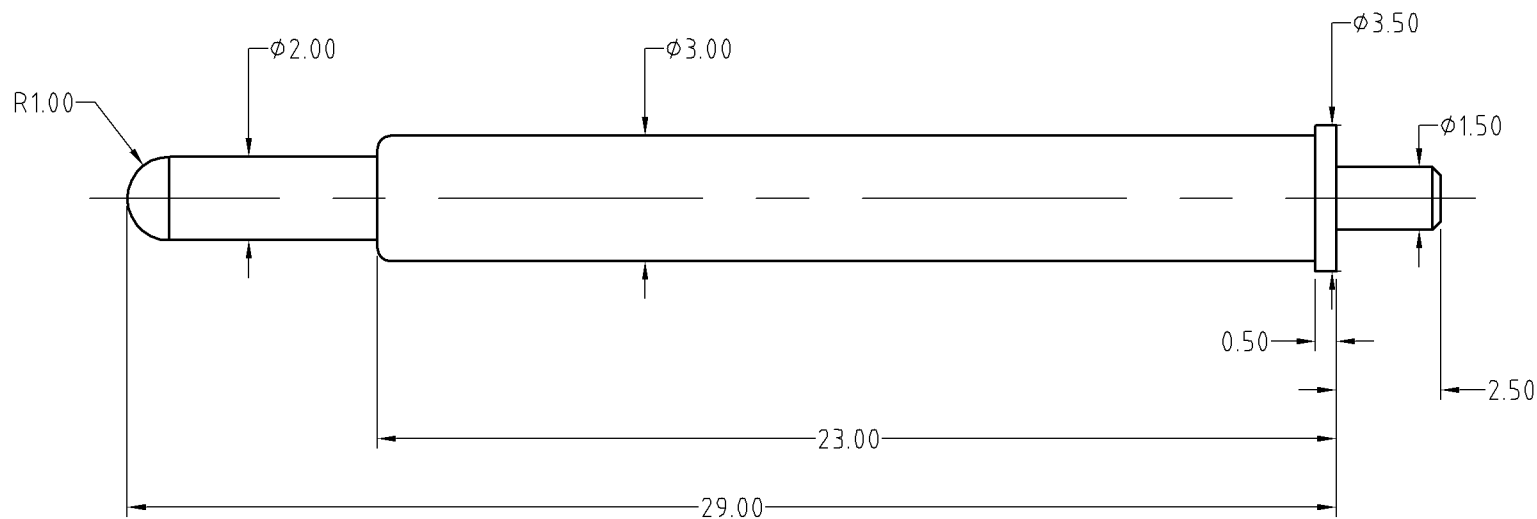

	D0	2013.05.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.		
ANGEL	$\pm 1^\circ$	A4				
0-6	± 0.05			SHEET: 1 of 1	PART NO.	BP184.01
6-30	± 0.10	DRAW			FILE NAME	BP184XX
30-150	± 0.15	CHECK		TITLE.	Pogo pin connector	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO				