

1

2

3

4

Note:

Materials:

.Plunger: Brass 0.125um Au over Ni

.Barrel: Brass 0.125um Au over Ni

.Spring: SUS 304 Au

Mechanical:

.Contact force: 70g±20g at 2.0 mm working stroke

.Full stroke: 2.10 mm

.Life test: 50,000 cycles

Electrical:

.Rated current & voltage: DC12V; 3A Max.


.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.


Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

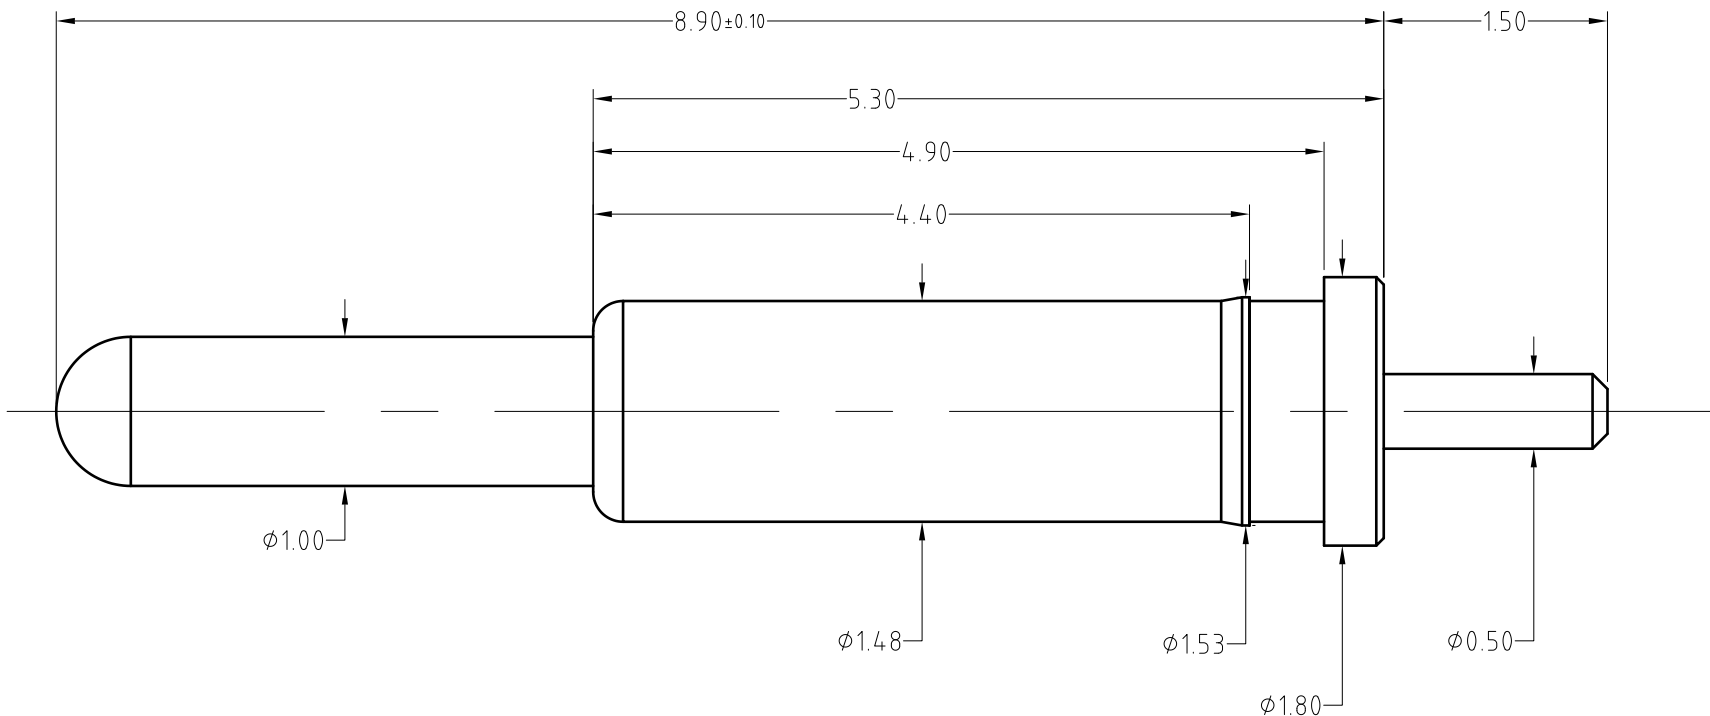

BOM		
Part	NO.	Qty
Plunger	B262-P1005	1
Barrel	B262-P1005	1
Spring	B262-S1001	1

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	 CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0~6	±0.05				SHEET: 1 of 1
6~30	±0.10	DRAW			PART NO.
30~150	±0.15	CHECK	FILE NAME	BP262XX	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO		TITLE.	Pogo pin	

ECN(DCN) NO.	A0	2015.11.23	NEW
REV	DATE	DESCRIPTION	