

1

2

3

4

Note:

Materials:

.Plunger: Brass 0.075um Au over Ni.

.Spring: SUS 0.025um Au

.Barrel: Brass 0.075um Au over Ni.

Mechanical:

.Contact force: 70g±20g at 1.0mm working stroke

.Full stroke: 1.40mm

.Life test: 10,000 cycles


Electrical:

.Rated current & voltage: DC 12V, 2A MAX

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.

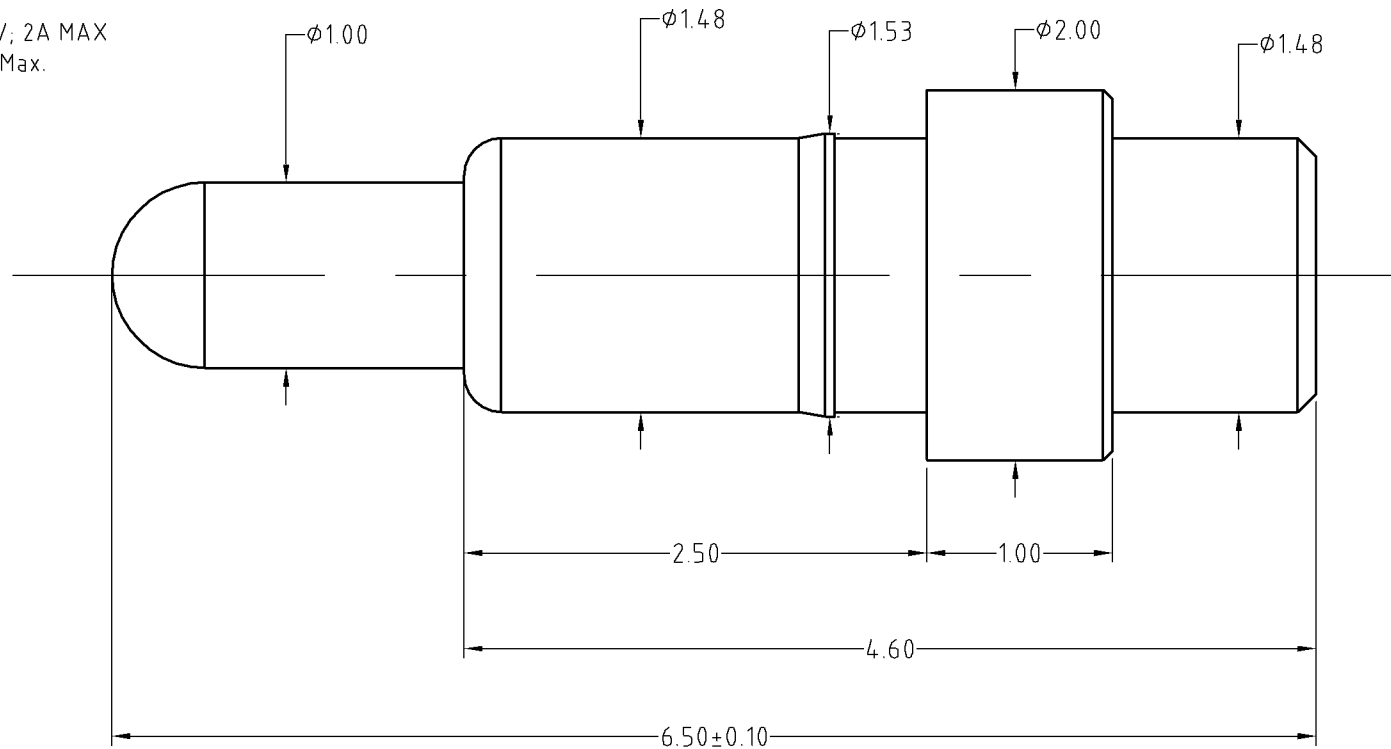

BOM

Part	NO.	Qty
Plunger	B267-P2003	1
Barrel	B267-B1003	1
Spring	M200-S1001	1

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0-6	±0.05		SHEET: 1 of 1	PART NO.	BP26721
6-30	±0.10	DRAW		FILE NAME	BP267XX
30-150	±0.15	CHECK		TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	D0	2015.06.27	NEW