

Note:

Materials:

- .Plunger: Brass 0.125um Au over Ni
- .Barrel: Brass 0.25um Au over Ni
- .Spring: SUS surface treatment

Mechanical:

- .Contact force: 80g±20g at 0.7mm working stroke
- .Life test: 20,000 cycles

Electrical:

- .Rated current & voltage: DC 12V; 1A
- .Contact resistance: 50 milliohm Max.


Cannot be used as the charging,

测试: 1.碱性人汗: 100毫升无矿物质水, 5克氯化钠, 5克磷酸氢二钠, 检查并调整PH值为9.5;

2.酸性人汗: 碱性人汗液体加入约2毫升浓度99%的醋酸, 检查并调整PH值为4.7;

最少样品数量: 7pcs, 每种汗液3pcs, 1PCS对比。

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

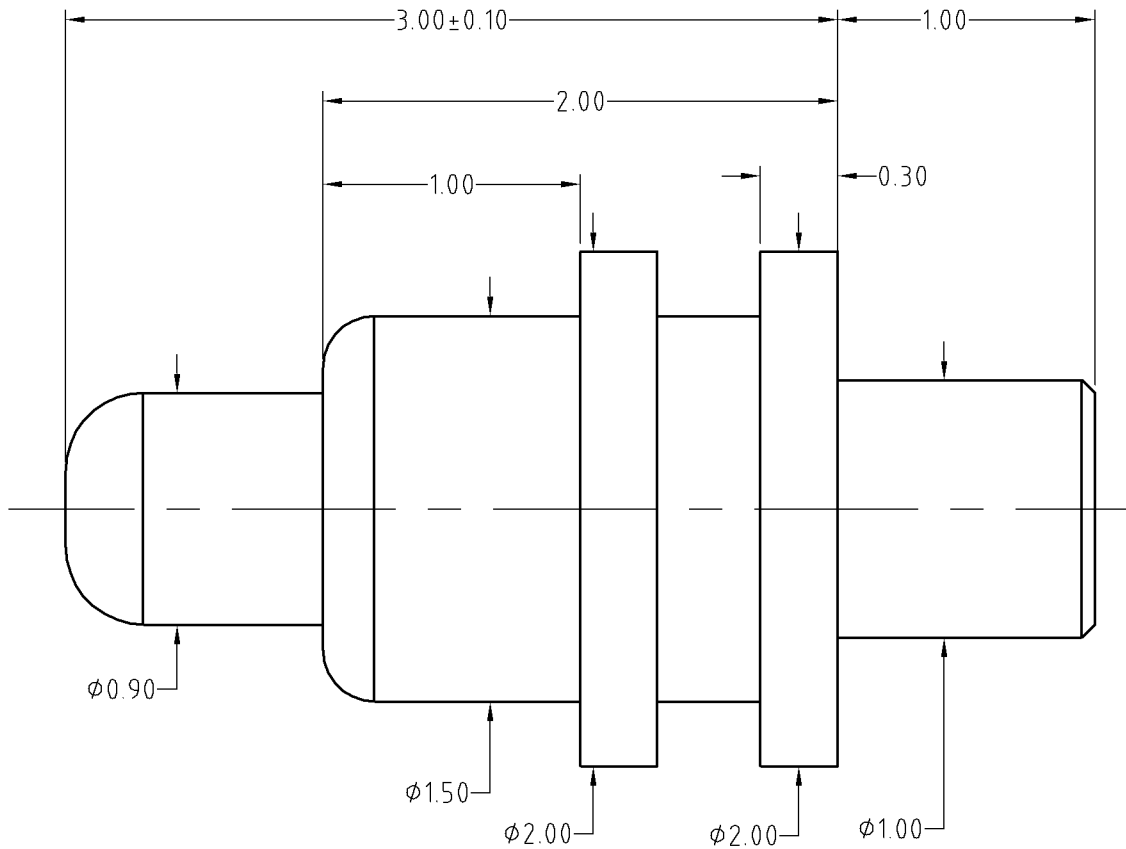

Approve Sign

BOM		
Part	NO.	Qty
Plunger	B337-P3005	1
Barrel	B337-B3010	1
Spring	B337-S2001	1

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0-6	±0.10		SHEET: 1 of 1	PART NO.	BP33731
6-30	±0.15	DRAW		FILE NAME	BP337XX
30-150	±0.20	CHECK		TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			

ECN(DCN) NO.	A0	2015.06.19	NEW
REV	DATE	DESCRIPTION	