

1

2

3

4

Note:

Materials:

.Plunger: Brass 0.125um Au over Ni.

.Spring: SUS surface treatment

.Barrel: Brass 0.125um Au over Ni.

Mechanical:

.Contact force: 40g±20g at 1.0mm working stroke

.Full stroke: 1.6mm

.Life test: 20,000 cycles


Electrical:

.Rated current & voltage: DC12V; 1A

.Contact resistance: 50 milliohm Max.



Approve Sign

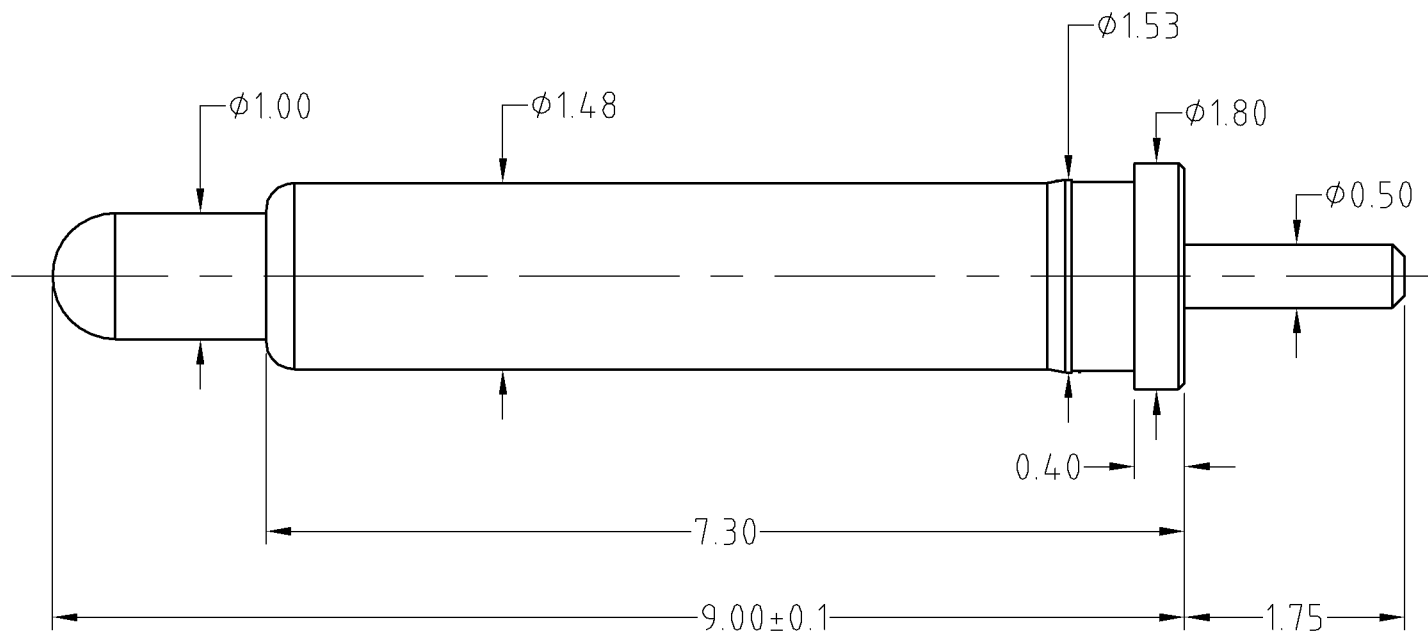

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±1°	A4	SHEET: 1 of 1	
0-6	±0.05			
6-30	±0.10	DRAW	PART NO.	BP33811
30-150	±0.15	CHECK	FILE NAME	BP338XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	TITLE	Pogo pin connector


东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

ECN(DCN) NO.	A0	2014.11.13	NEW
REV	DATE	DESCRIPTION	