

Note:

Materials:

.Plunger: Brass 0.25um Au over Ni

.Barrel: Brass 0.25um Au over Ni

.Spring: SUS 0.1um Au over Ni

Mechanical:

.Life test: 20,000 cycles

Electrical:

.Contact resistance: 50 milliohm Max.

Cannot be used as the charging,

To ensure the best usage, please operate it based on the working height.  
Based on the engineering drawings, shall not exceed the maximum allowed compression.

A

B



C

D



Approve Sign

Signature box

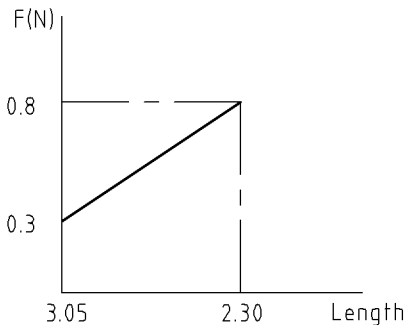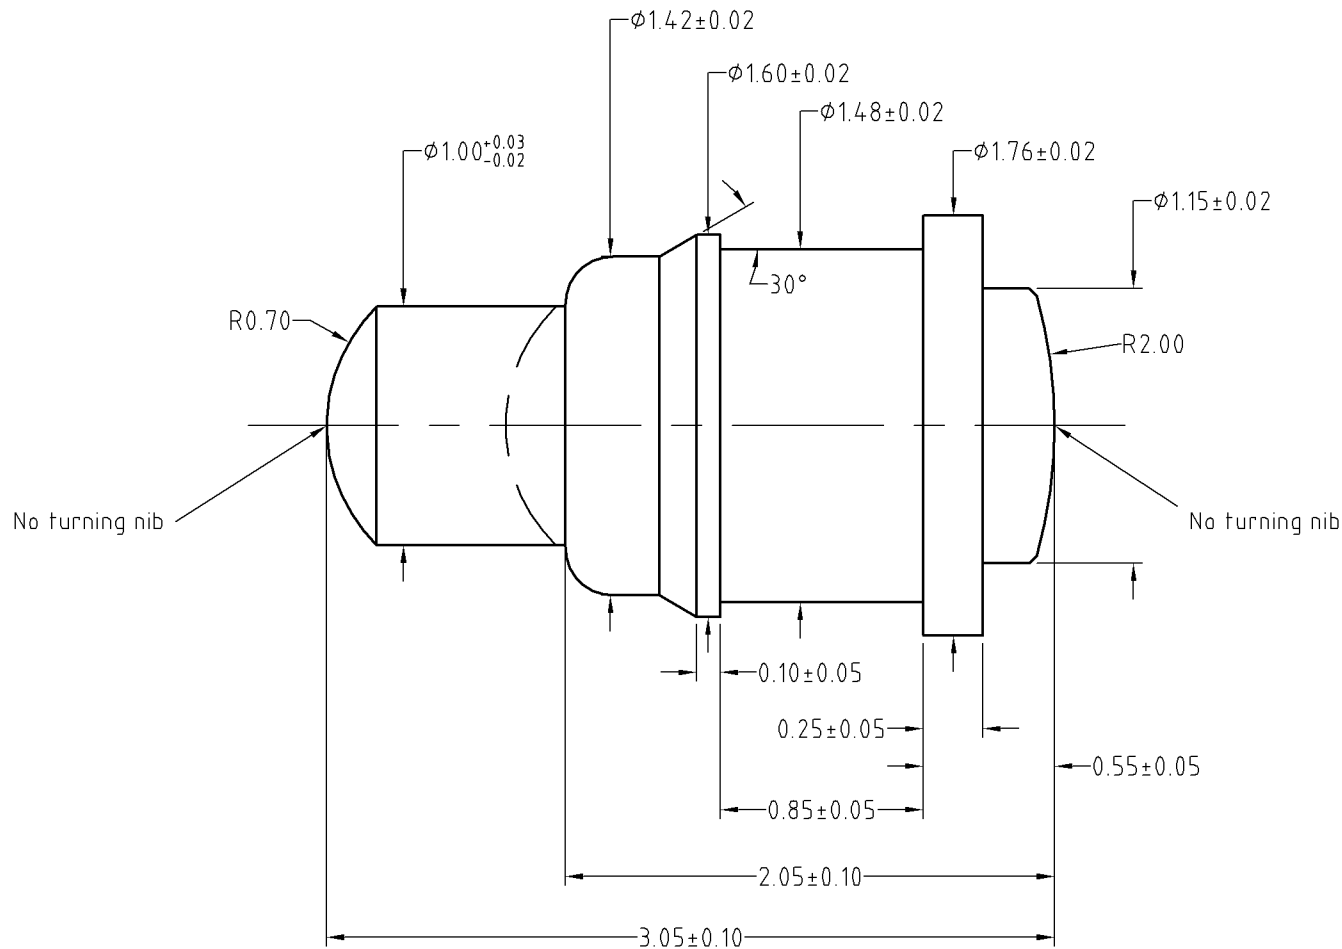

Spring force-Length

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	$\pm 1^\circ$	A4	SHEET: 1 of 1	
0~6	$\pm 0.10$		PART NO.	BP35811
6~30	$\pm 0.15$	DRAW	FILE NAME	BP358XX
30~150	$\pm 0.20$	CHECK	TITLE	Pogo pin connector
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		



_____	D0	2015.01.16	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION