


Note:
 Materials:
 .Plunger: Brass 0.25um Au over Ni
 .Barrel: Brass 0.125um Au over Ni
 .Spring: SUS 304 Au
 Mechanical:
 .Contact force: 30g±15g at 0.6mm working stroke
 .Max. compression: 0.8mm
 .Life test: 50,000 cycles
 Electrical:
 .Rated current & voltage: DC 12V; 1A
 .Contact resistance: 50 milliohm Max.
 .Cannot be used as the charging

To ensure the best usage, please operate it based on the working height.
 Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

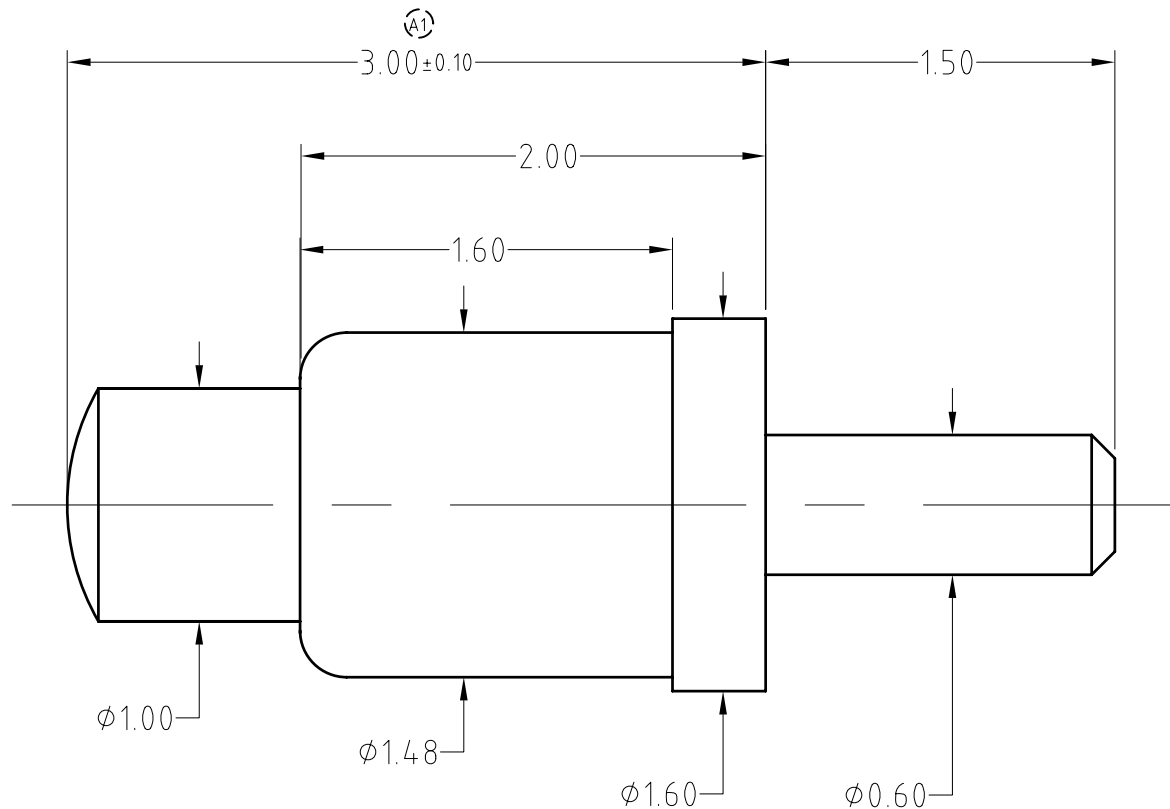

BOM		
Part	NO.	Qty
Plunger	M601-P6010	1
Barrel	B521-B1005	1
Spring	B521-S1001	1

(A1)

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A1	2016.03.11	修改总长
	A0	2015.11.05	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.
ANGEL	±2°	A4		
0~6	±0.10			
6~30	±0.20	DRAW	PART NO.	BP52111
30~150	±0.30	CHECK	FILE NAME	BP521XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO		TITLE.	Pogo pin