Note:
Materials:
.Plunger: Brass plating Ni 100u"
.Barrel: Brass plating Ni 100u"
.Spring: SUS
Mechanical:
.Contact force: 150g±20% at 3.mm working stroke
.Life test: 20,000 cycles
Electrical:
.Rated current & voltage: DC 12V; 1A
.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

ROHS

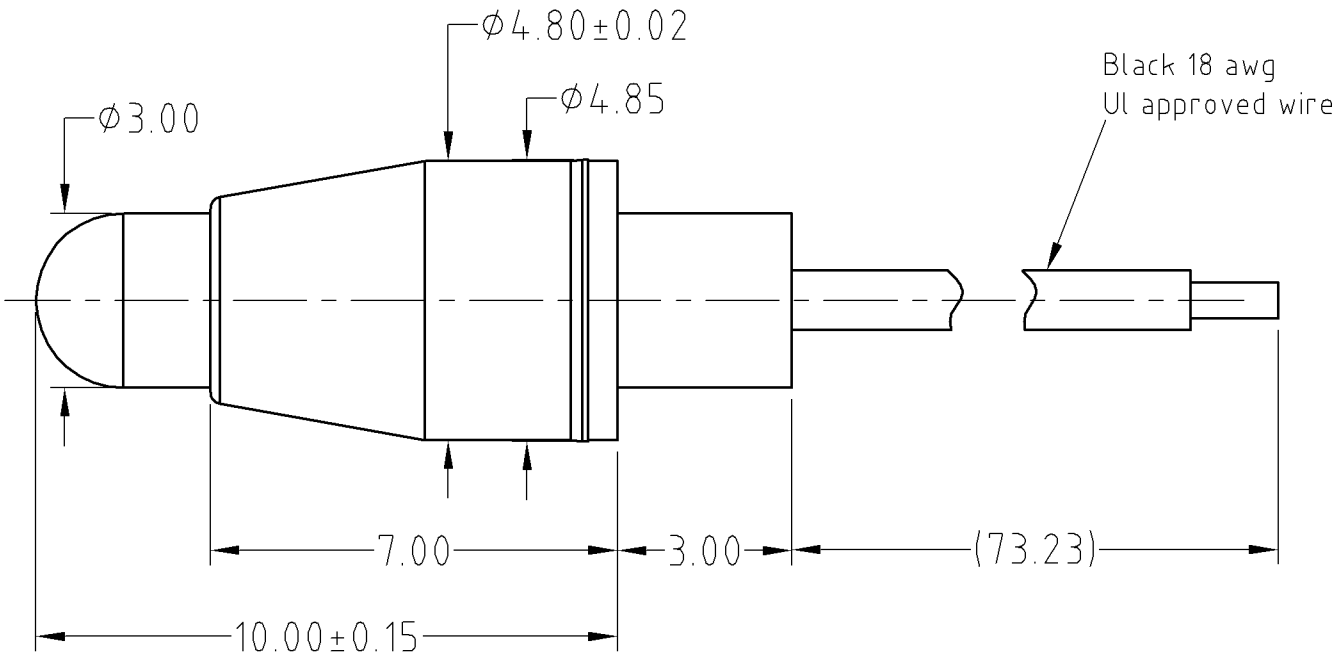

ECN(DCN) NO.	REV	DATE	DESCRIPTION
————	D0	2013.05.30	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1			
6~30	±0.10	DRAW			PART NO.	BS14511
30~150	±0.15	CHECK			FILE NAME	BS145XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pogo pin connector