

1

2

3


4

Note:  
 Materials:  
 .Plunger: Brass 0.25um Au over Ni  
 .Barrel: Brass 0.25um Au over Ni  
 .Spring: SUS 304 Au  
 Mechanical:  
 .Contact force: 70g±20g at 1.10mm working storke  
 .Life test: 20,000 cycles  
 Electrical:  
 .Rated current & voltage: DC 12V; 3A  
 .Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.  
 Based on the engineering drawings, shall not exceed the maximum allowed compression.



Approve Sign

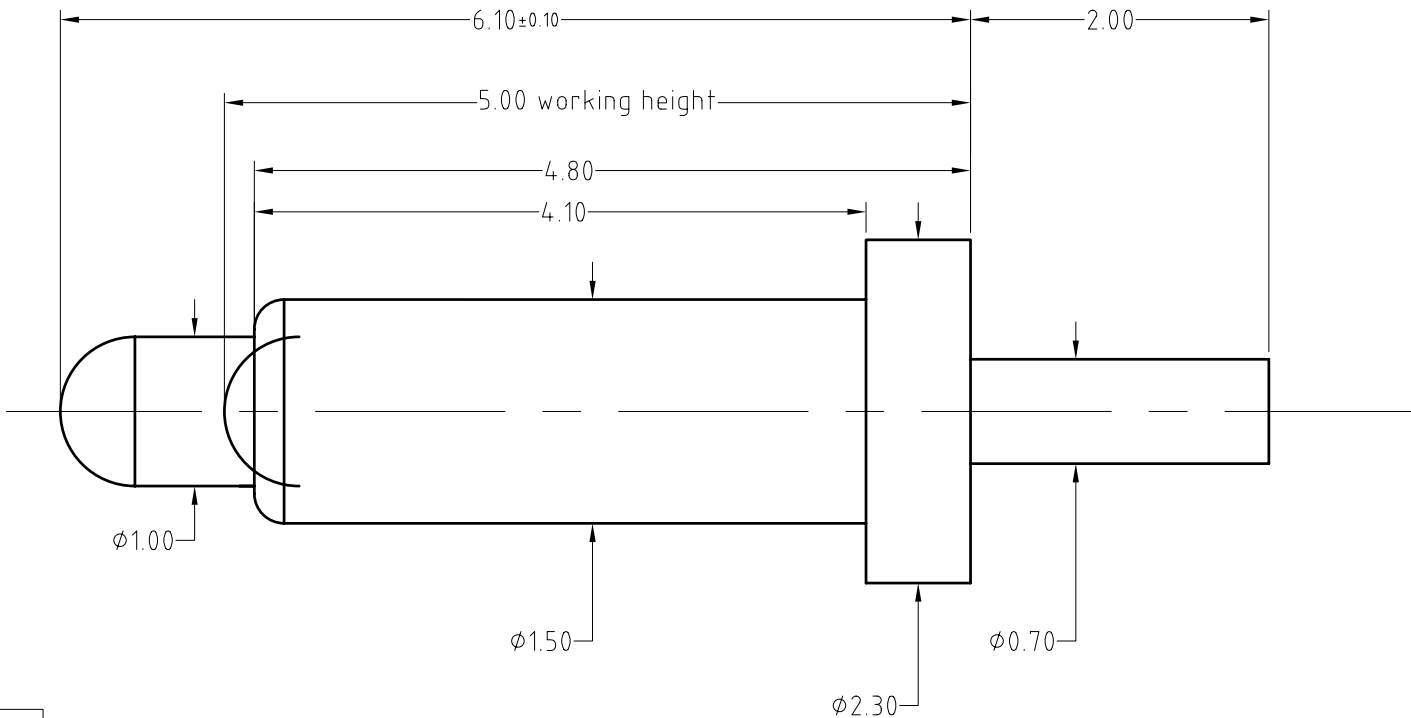

BOM		
Part	NO.	Qty
Plunger	B350-P1010	1
Barrel	B569-B1010	1
Spring	B569-S1001	1

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.05		SHEET: 1 of 1
6~30	±0.10	DRAW	
30~150	±0.15	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

**CFE** 东莞市川富电子有限公司  
 CFE CORPORATION CO.,LTD.

PART NO. BP56911

FILE NAME BP569XX

TITLE. Pogo pin

_____	A0	2015.12.12	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION