



Note: <注意>
 Electrical: <电气性能>
 .Rated current & voltage: DC 12V, 1A Max.
 <额定电压, 电流: DC 12V, 1A>
 .When the current is greater than 1A then need to
 increase the time delay circuit(3 second)
 100% open & short test.
 <100%导通, 短路测试>

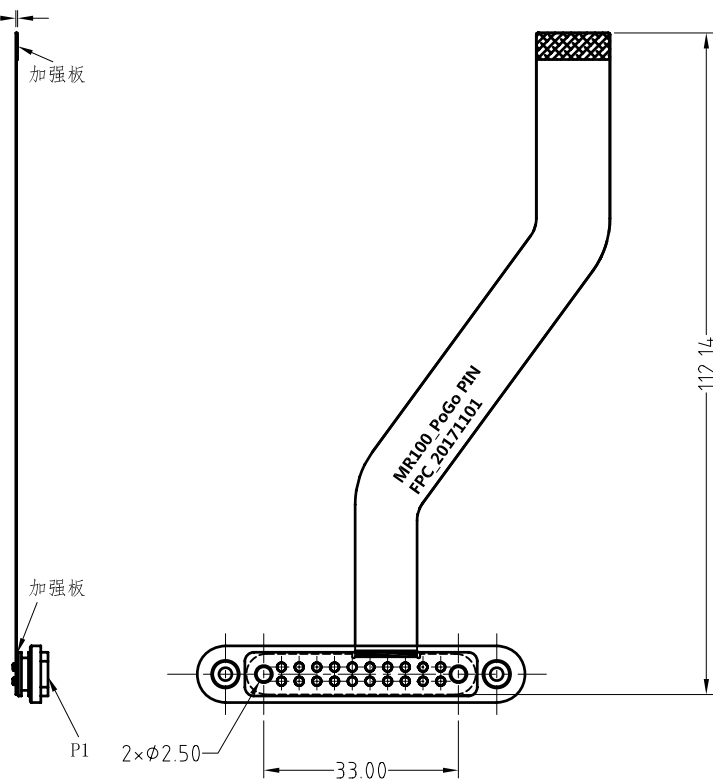

Approve Sign

P1→P2	
1	----- 1
2	----- 2
3	----- 3
4	----- 4
...	
20	----- 20
NONE	----- 21
NONE	----- 22
NONE	----- 23
NONE	----- 24

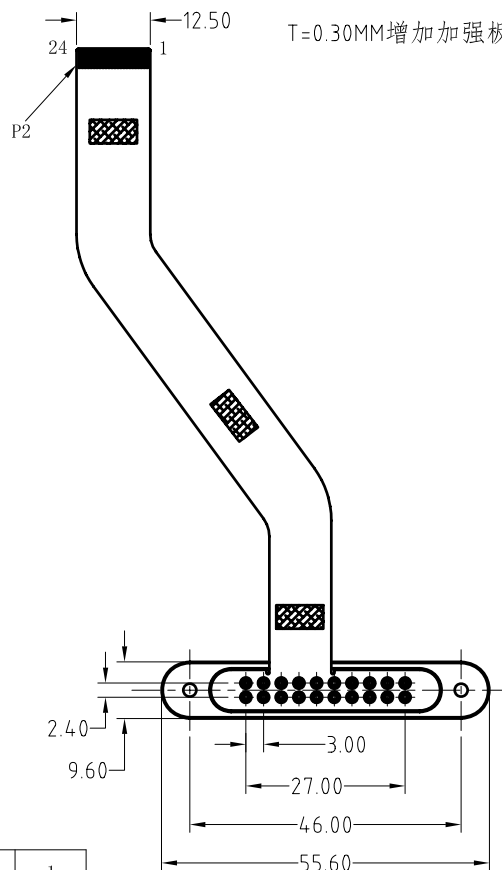

4	Rubber ring <橡胶圈>	03 00052-2000	1
3	FPC PET 0.15MM thikness board <0.15MM厚PET材质 FPC板>	04 00018-1000	1
2	Pin plating 0.125um Au <车针 电镀金0.125um>	01 00020-1005	20
1	Black HTN UL94 V-0 <黑色 HTN UL94 V-0>	03 00052-1000	1
序号 <NO.>	规格 <Specification>	料号 <P/N>	数量 <Qty>

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.
ANGEL	±2°	A4	
0~6	±0.10		SHEET: 1 of 1
6~30	±0.20	DRAW	
30~150	±0.30	CHECK	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO	

CFE® 东莞市川富电子有限公司
 CFE CORPORATION CO.,LTD.

PART NO. MFA011501-20A1A0

FILE NAME MXA0115

TITLE. Magnetic connector/磁吸连接器

_____	D1	2017.11.11	修改尺寸及结构
_____	D0	2017.11.04	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION